

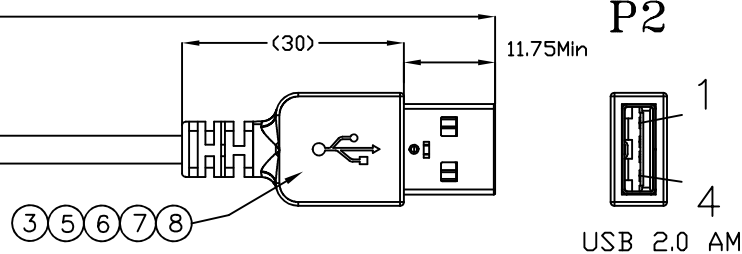


USB C PLUG

NOTE:
 1.CABLE ASSEMBLY MUST BE RoHS COMPLIANT.
 2.CABLE MUST BE OPEN,SHORT,MISWIRE 100% TEST.
 3.USB CABLE ELECTRIC TEST:
 A.VOLTAGE: 300V DC.
 B.CONTACT RESISTENCE: 5 Ohm Max.
 C.INSULATION RESISTENCE:2M Ohm Min.



USB 2.0 AM



PART NO.

C8 F2 K 3 A04 E 1M0
 1 2 3 4 5 6 7

1.SERIES NO.

C8=USB TYPE
 2.CONNCTOR OPTION.
 F2=USB 3.1/USB 2.0
 3.CONNECTOR TYPE..
 K=CM/AM

4.CABLE COLOR.

3=BLACK
 5.TYPE.
 A04=Rp 56K ohm
 6.GREEN OPTION.
 E=RoHS
 7.LENGTH NO.
 1M0=1000mm


P1		WIRING DIAGRAM			P2	
USB C PLUG		WIRE			USB 2.0 AM	
PIN	SIGNAL NAME	WIRE NUMBER	SIGNAL NAME	COLOR AWG	PIN	SIGNAL NAME
A1,B1,A12,,B12	GND	1	GND_PWRr+t1	BLACK	4	GND
A4,B4,A9,B9	VBUS	2	PWR_VBUS1	RED	1	VBUS
A5	CC	W/RESISTOR				
B5	VCONN	N/A				
A6	Dp1	3	UTP_Dp	GREEN	3	D+
A7	Dn1	4	UTP_Dn	WHITE	2	D-
SHELL	SHIELD	BRIAD	SHIELD	BRIAD	SHELL	SHIELD

8	Over Mold	PVC COLOR BLACK
7	Inner Mold	PE
6	FOIL	COPPER FOIL
5	TIN	TIN STICK,TIN WIRE
4	PCBA	PCBA, W/Resistor(Rp 56K ohm)
3	CONN P2	USB 2.0 AM,BLACK INSULATOR, CONTACT PLATING: Au 30u' SHELL PLATED NICKEL,(W/TIN PLATE)
2	CONN P1	USB C PLUG,BLACK INSULATOR,CONTACT PLATING: Pd-Ni 30u'+Gold 2u' SHELL PLATED NICKEL,(W/TIN PLATE)
1	CABLE	USB 2.0 UL2725 28/24 ADB DD:4.0mm, BLACK PVC JACKET
NO.	TITLE	DESCRIPTION


For SIP
 For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
ANG.	±	
0.	±1	
.0	±0.5	
.00	±0.25	
SCALE: AS SHOWN	UNIT: mm	
DRAWN RITA	07/04/2018	DRAWN NAME: USB C PLUG to 2.0 AM CABLE
CHECKED		1/2
APPROVED	/ /	PRODUCT NO: C8F2K3A04E1M0
REV. A		FILE NAME: C8F2K3A04E1M0(GB)


REV.	DESCRIPTION	DATE	SIZE	REV. A
1			A4	
2				
3				
4				
5				
6				
7				
8				
9				
10				

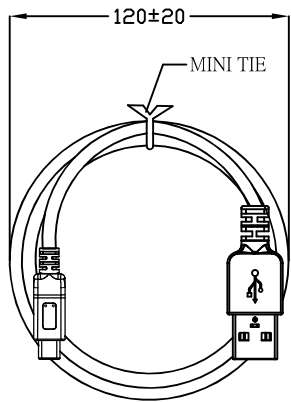


USB C/AM 2.0 CABLE

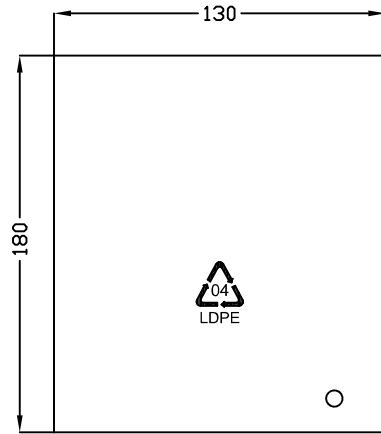


PE BAG:L180*W130*T0.05mm

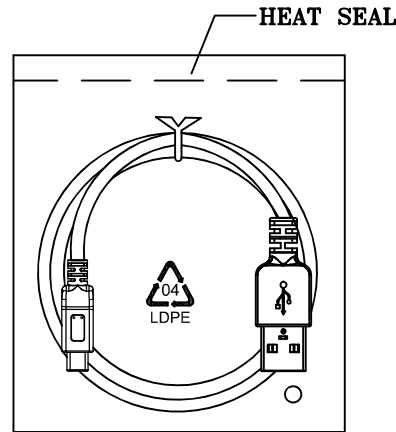


1PCS CABLE/PE BAG

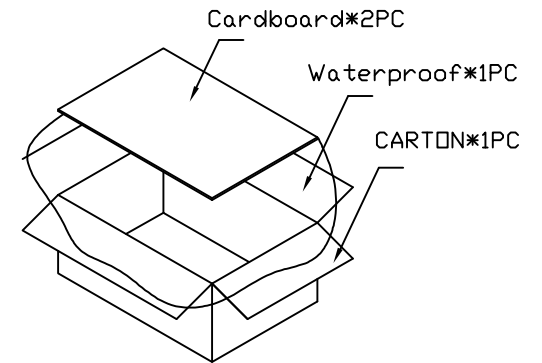

(CARTON:L457*W298*H228mm Material K=K)

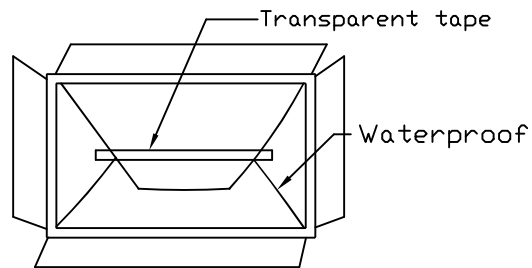

(After the installed Product, carton sealing tape should be transparent)

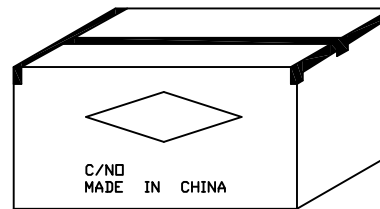

(CARTON:L457*W298*H228mm,Material K=K)
(200PCS CABLE/CARTON)

PO NO:	
ITEM NO:	
QTY:	PCS
N.W.:	KGS
G.W.:	KGS
MEAS:	1.1'

(CARTON SIDE)

- For SIP
- For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	± 1	
0.	± 0.5	CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
.00	± 0.25	
SCALE: AS SHOWN	UNIT: mm	DRAWN NAME:
DRAWN RITA	07/04/2018	USB C Plug to 2.0 AM Cable
CHECKED		PRODUCT NO: C8F2K3A04E1M0
APPROVED	/ /	FILE NAME: C8F2K3A04E1M0(GB)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		