

NOTE:
 1.CABLE ASSEMBLY MUST BE RoHS COMPLIANT.
 2.CABLE MUST BE OPEN,SHORT,MISWIRE 100% TEST.
 3.USB CABLE ELECTRIC TEST:
 A.VOLTAGE: 300V DC.
 B.CONTACT RESISTENCE: 5 Ohm Max.
 C.INSULATION RESISTENCE:2M Ohm Min.

PART NO. _____
 SERIES NO. _____
 C8=USB TYPE
 CONNECTOR OPTION _____
 F2=USB 3.1/USB 2.0
 CONNECTOR TYPE
 K=CM/AM _____
 LENGTH NO. _____
 1M0= 1000 mm
 GREEN OPTION
 E=RoHS
 TYPE.
 A04=Rp 56K ohm
 CABLE COLOR
 3=BLACK

P1		WIRING DIAGRAM			P2	
USB C PLUG		WIRE			USB 2.0 AM	
PIN	SIGNAL NAME	WIRE NUMBER	SIGNAL NAME	COLOR AWG	PIN	SIGNAL NAME
A1,B1,A12,B12	GND	1	GND_PWR+t1	BLACK	4	GND
A4,B4,A9,B9	VBUS	2	PWR_VBUS1	RED	1	VBUS
A5	CC	W/RESISTOR				
B5	VCONN	N/A				
A6	Dp1	3	UTP_Dp	GREEN	3	D+
A7	Dn1	4	UTP_Dn	WHITE	2	D-
SHELL	SHIELD	BRIAD	SHIELD	BRIAD	SHELL	SHIELD

8	Over Mold	PVC COLOR BLACK
7	Inner Mold	PE
6	FOIL	COPPER FOIL
5	TIN	TIN STICK,TIN WIRE
4	PCBA	PCBA, W/Resistor(Rp 56K ohm)
3	CONN P2	USB 2.0 AM,BLACK INSULATOR, CONTACT PLATING: Au 30u" SHELL PLATED NICKEL,(W/TIN PLATE)
2	CONN P1	USB C PLUG,BLACK INSULATOR,CONTACT PLATING: Pd-Ni 30u"+Gold 2u" SHELL PLATED NICKEL,(W/TIN PLATE)
1	CABLE	USB 2.0 UL2725 28/24 ADB OD:4.0mm, BLACK PVC JACKET
NO.	TITLE	DESCRIPTION

○ For SIP
 (ST) For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. ±
 0. ±1
 .0 ±0.5
 .00 ±0.25

SCALE: AS SHOWN UNIT: mm


DRAWN Vicky 08/18/2016
 CHECKED JKC 08/18/2016
 APPROVED //

SIZE A4 REV. X1


OXDC
 CHANT SINCERE CO.,LTD
 TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: USB C PLUG to 2.0 AM CABLE 1/2
 PRODUCT NO.: C8F2K3A04E1M0
 FILE NAME: C8F2K3A04E1M0(GB)


REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

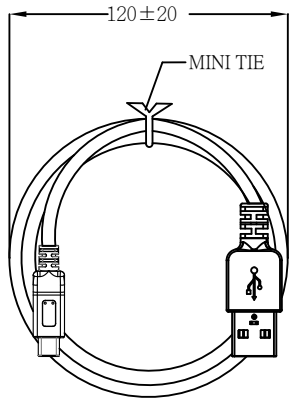


USB C/AM 2.0 CABLE

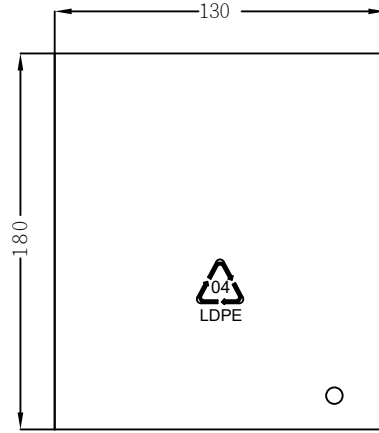


PE BAG:L180*W130*T0.05mm

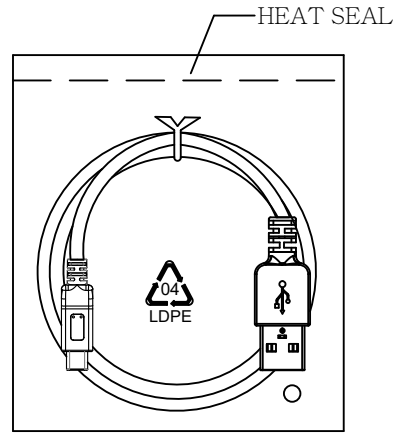


1PCS CABLE/PE BAG

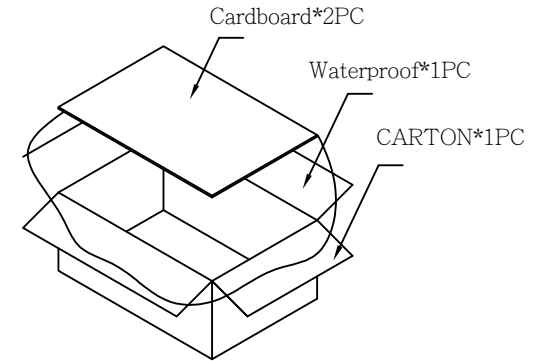

(CARTON:L457*W298*H228mm Material K=K)

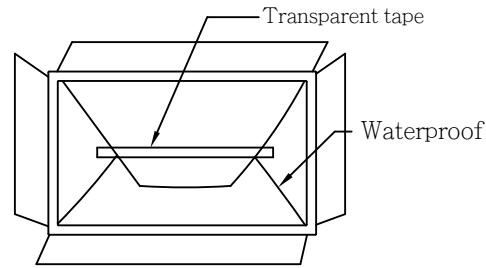

(After the installed Product, carton sealing tape should be transparent)

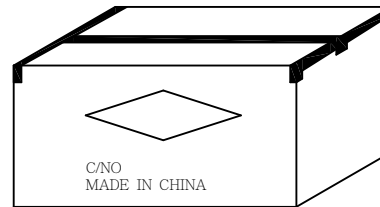

(CARTON:L457*W298*H228mm,Material K=K)
(200PCS CABLE/CARTON)

PO NO:	
ITEM NO:	
QTY:	PCS
N.W.:	KGS
G.W.:	KGS
MEAS:	1.1'

(CARTON SIDE)

- For SIP
- For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±
0.	±1
.0	±0.5
.00	±0.25
SCALE: AS SHOWN	UNIT: mm
DRAWN Vicky	08/18/2016
CHECKED Jackyc	08/18/2016
APPROVED	//
SIZE A4	REV. X1



CHANT SINCERE CO.,LTD

TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME:
USB C Plug to 2.0 AM Cable

PRODUCT NO.: C8F2K3A04E1M0

FILE NAME: C8F2K3A04E1M0(GB)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		