

PART NO. _____

SERIES NO. _____

C8=USB TYPE

CONNECTOR OPTION _____

FD=USB 3.1/VGA

CONTACT TYPE _____

N= CM/F

CABLE COLOR _____

3=BLACK

2=GRAY(灰線白殼)

LENGTH NO. _____

05C=50mm


GREEN OPTION:

E=RoHS

TYPE.

B02=Via Ver.

11	主體殼	HDB 15P/F塑膠蓋(ABS+PC, 3=黑色 2=白色, 表面:鏡面拋光, 客戶LOGO Printing)
10	後殼	塑膠蓋(ABS+PC, 黑色, 表面咬花:MT-11000)
9	鐵殼	SPCC, SHELL PLATED NICKEL
8	內模	PE
7	PCB'A	L:30*W:21*T1.0mm(FR-4,4層板)
6	Tin	錫絲,錫條,錫膏(符合RoHS)
5	分線排	32AWG 分線排
4	套管	黑色熱縮套管 0.8*15mm & 2.5*6mm
3	CONN.	HDB 15P/F 黑色膠芯 鐵殼鍍鎳 端子鍍金 G/F
2	CONN.	USB C PLUG, CONTACT PLATING: Pd-Ni 30u"+Gold 2u" SHELL PLATED NICKEL, (W/TIN PLATE), BLACK INSULATOR
1	CABLE	USB3.1 UL20276 32/32/26 ADB OD:4.8mm, BLACK PVC JACKET
Item	Name	Description

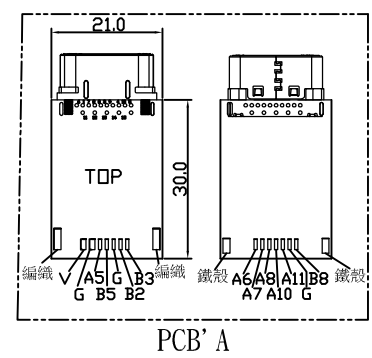

UNLESS OTHERWISE SPECIFIED TOLERANCE	
0.	±1.0
.0	±0.5
.00	±0.3
SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	10/04/2016
CHECKED	
APPROVED	

CHANT SINCERE CO., LTD
 TEL:886-02-86471251 FAX:886-02-86472962


DRAWN NAME: _____ (PDR-16022)

USB C PLUG TO VGA F
 CABLE L=5cm 1/2


PRODUCT NO. C8FDNXB02E05C

FILE NAME: C8FDN3B02E05C(GB)


REV.	DESCRIPTION	DATE	SIZE A4	REV. A
1				




(USB CM TO VGA F CABLE)

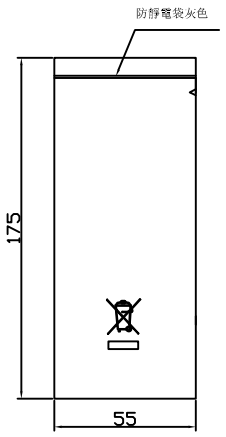


(防靜電袋)

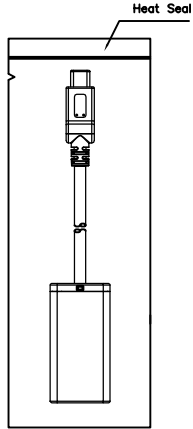


(1pcs / 防靜電袋)

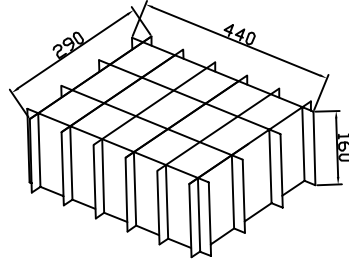

(刀卡組裝圖)

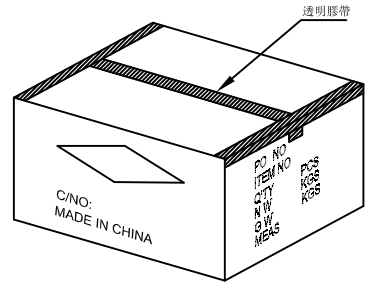


(外箱:L45.7*W29.8*H35.5cm 材質:K=K)
(150PCS/外箱)

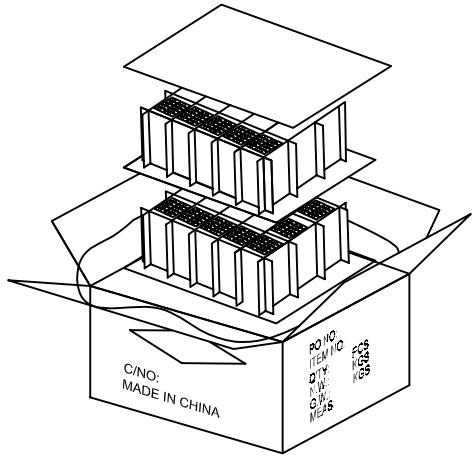

(包裝視圖)

每個格柵放10PCS產品,
產品的小頭朝上

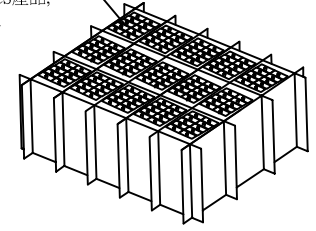

(150pcs / 層)

- 注:
1. 單PC成品用防靜電袋包裝, VGA端朝下.
 2. 防靜電袋熱封口時應注意熱封溫度, 且勿溫度過高, 封口要平整.
 3. 裝箱時產品要站立式放入刀卡, 刀卡每隔放10PCS, 每層放150PCS, 共放兩層, 一箱放300PCS成品, 產品之間需用刀卡隔離, 每層用隔板保護, 如上圖所示.

UNLESS OTHERWISE SPECIFIED TOLERANCE	
0.	±1.0
.0	±0.5
.00	±0.3



CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	10/04/2016
CHECKED	
APPROVED	

DRAWN NAME: (PDR-16022)
USB C PLUG TO VGA F CABLE L=5cm 2/2

PRODUCT NO. C8FDNXB02E05C

REV.	DESCRIPTION	DATE	SIZE A4	REV. A	FILE NAME: C8FDN3B02E05CGB)
1					