

NOTE:
 1.CABLE ASSEMBLY MUST BE RoHS COMPLIANT.
 2.CABLE MUST BE OPEN,SHORT,MISWIRE 100% TEST.
 3.DP/MDP CABLE FOR DP 1.2a LEVEL.
 4.THE MP PRODUCTION LINE ONLY PROCESS TO EYE DIAGRAM AS A CONTROL PROJECT
 5.CABLE.ELECTRIC TEST:
 A.VOLTAGE: 300V DC.
 B.CONTACT RESISTANCE: 5 Ohm Max.
 C.INSULATION RESISTANCE: 2M Ohm Min.

PART NO.

SERIES NO. CK 04 1 3 3 1 AO1A E 1M8
 CK=Displayport
 CONNECTOR OPTION 04=DP-20/MINI DP-20 (MOLDED/MOLDED)
 CONNECTOR TYPE 1=M/M
 CABLE COLOR 3=BLACK
 LENGTH NO. 1M8=1800mm
 GREEN OPTION: E=RoHS TYPE.
 CONTACT/SHELL PLATING: 1=Gold Plated 15u"/Nickel
 CABLE OPTION: 3=UL20276 CABLE

接線表

P1	P2	P1	P2
1 白	12 白	15 白	16 白
3 棕	10 地線	17 黑	18 黑
2 地線	8 地線	16 地線	14 地線
4 白	17 紅	13 紅	4 紅
6 紅	15 橙	14 橙	6 橙
5 地線	13 黃	18 黃	2 黃
7 白	11 白	19 白	19 白
9 綠	9 綠	鐵殼	編織
8 地線	7 地線	鐵殼	鐵殼
10 白	5 白		
12 藍	3 藍		
11 地線	1 地線		

7	PVC	PVC 60P BLACK
6	FOIL	COPPER FOIL
5	PE	PE
4	TIN	Tin Stick, Tin Wire
3	CONN	MINI DP 20P Male, Black Insulator, Contact Gold Plated 15u", Shell Nickel Plated(W/TIN Plate)
2	CONN	DP 20P Male, Black Insulator, Contact Gold Plated 15u", Shell Nickel Plated, (W/TIN Plate) Top & Bottom Assembly Cover Color Black
1	CABLE	UL20276 (1P#32+D+AL+MYLAR)*5C+4C#32+MYLAR+ADB(AL85%) OD5. 0mm, PVC Jacket Black

For SIP
 For CmK/Cpk



Vicky 10/06/16
 Jacky 10/06/16


DP 20M TO Mini DP 20M CABLE

1/2


CK041331A01AE1M8

CK041331A01AE1M8(GB)


X1

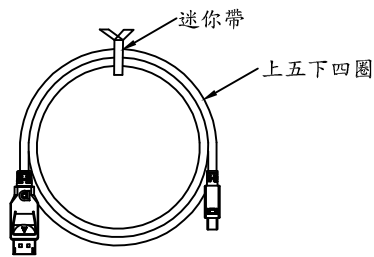


(繞線方式)

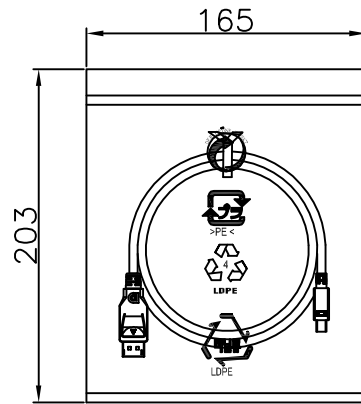


ZIP BAG:L203mmxW165mmxT0.05mm.
(夾鏈袋四國環保標誌)

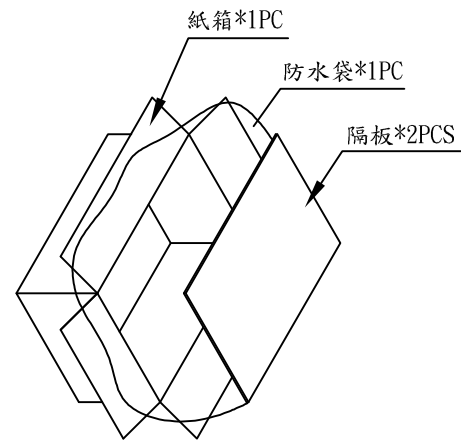


(外箱:45.7*29.8*22.8cm 材質:K=K)

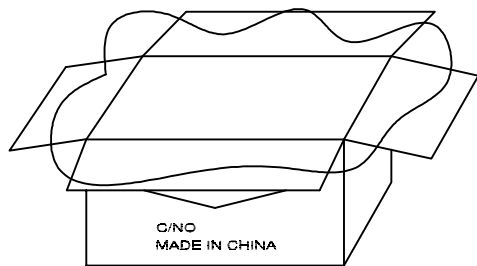

(外箱:45.7*29.8*22.8cm 材質:K=K)

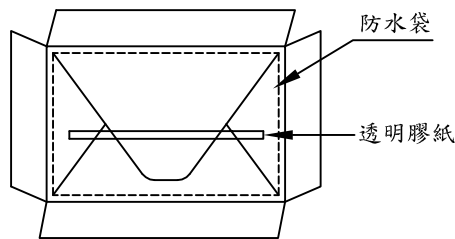

(裝好產品後,防水袋需用透明膠紙封口)

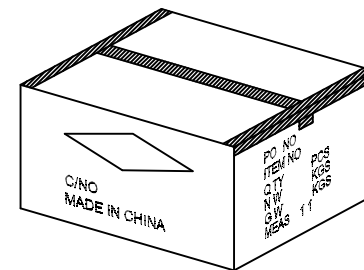

(外箱:45.7*29.8*22.8cm 材質:K=K)
(100PCS/外箱)

包裝說明:

1. 單PCS用迷你帶扎線, 每PCS裝一個PE袋, PE袋上貼標籤, 裝箱時, 先在外箱內放入1PCS隔板及1PCS防水袋, 放入100PCS產品後, 上面再放1PCS隔板, 防水袋用透明膠紙封口, 再用膠紙封外箱.



Vicky 10/06/16
Jacky 10/06/16

DP 20M TO Mini DP 20M CABLE

2/2

CK041331A01AE1M8

CK041331A01AE1M8(GB)



X1