



A-Code(P1)

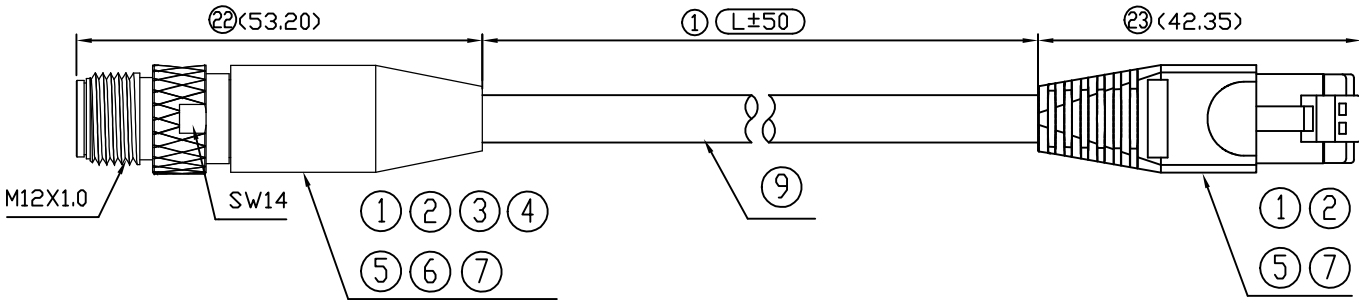

RJ45(P2)

SPECIFICATION
ELECTRICAL
 Current rating(40°C): 4A
 Voltage rating: 250V AC/DC
 Temperature range: -25°C TO +85°C
PART NO.


CW 06 48 A A D B03 E XXX
 1 2 3 4 5 6 7 8 9

- 1.Series NO.
CW=Waterproof Connection
- 2.Connector Option:
06=M12 180° Male / RJ45
- 3.Pin:48=04/08 pin
- 4.Code:A=A-Code
- 5.IP:A=67
- 6.AWG:D=26AWG
- 7.TYPE.
- 8.Green Option: E=RoHS
- 9.Length:
EX.60C=60CM, 3M5=3.5M
1M0=1M, 2M0=2M

WIRING DIAGRAM(26AWG)



ITEM	PART	DESCRIPTION
1	Connector	M12 A-Code 4pin Male Cable end RJ45 8P8C Connector
2	Contact	M12 Conn.:BRASS(C3604-EH) Over 50u" Nickel min. Gold Flash RJ45:Phosphor Bronze(C5191), Gold 50u"
3	Male Front Metal Body	BRASS(C3604-EH) 50u" Nickel min.
4	Male Middle Holder	BRASS(C3604-EH) 50u" Nickel min.
5	Plastic Body	M12 Conn.:PA66(6401G6) GF30% ,rated UL94V-0 RJ45:Polycarbonate,rated UL 94V-0
6	Crimp O-Ring	Silicon rubber 60°
7	Rubber Boot	M12 Conn.:Silicon rubber 70° RJ45:PVC
8	Epoxy	NAEFUMIO 7391-38 A:B=3:1
9	Cable	S/FTP Cat.6a 26AWG 4 twisted pair ,Jacket:TPU Green, OD6.2



UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	± 2°
0.	± 0.50
.0	± 0.30
.00	± 0.20



CHANT SINCERE CO.,LTD
 TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm	DRAWN: RILEY	12/05/17	DRAWN NAME:	M12 A-Code 4pin Male To RJ45 Cable (26AWG)
CHECKED:	/ /	APPROVED:	/ /	PRODUCT NO.	CW0648AADB03EXXX
REV.	DESCRIPTION	DATE	SIZE A4	REV. A	FILE NAME: CW0648AADB03E