
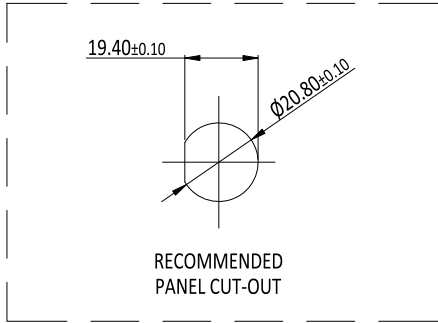




SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: HIGH TEM, THERMAL PLASTIC , RATED UL94V-0
2. CONTACTS: COPPER ALLOY
 UNDERPLATE: 40u"~100u" NI
 CONTACT AREA: SELECTIVE GOLD FLASH 0.8u"
3. METAL PARTS: STEEL WITH NI PLATING
4. CABLE: PVC, BLACK
5. PCB: FR-4


ELECTRICAL CHARACTERISTIC:
1. DIELECTRIC WITHSTANDING VOLTAGE: 30 V-AC FOR 1 MINUTE.
2. INSULATION RESISTANCE: 100 MΩ MIN. AT 500 V DC
3. CURRENT RATING: 1 A MAX.
4. AWG SINGAL LINE: 1P*28 AWG+24AWG*2C OD=4.5±0.15 mm

ENVIRONMENT:
1. TEMPERATURE RANGE: -20°C TO +80°C

NOTE:
DEGREE OF PROTECTION: IP 67

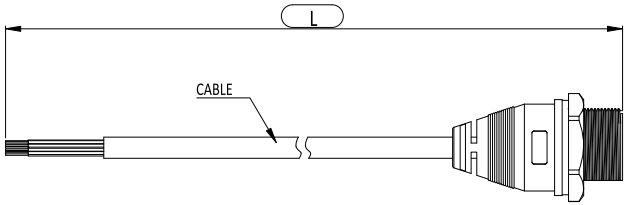

SHELL	DRAIN	28 AWG	5
4	BLACK	24 AWG	4
3	GREEN	28 AWG	3
2	WHITE	28 AWG	2
1	RED	24 AWG	1
USB CONN.	WIRE COLOR	AWG	5PIN CONN.
PIN OUT			

1	13152020010	CW30323ACA01E1M0	1000±30mm		
ITEM	NEW P/N	OLD P/N	L (LENGTH)	NOTE	
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0 ±0.50 0 ±0.30 .00 ±0.20		 SIP 	 CHANT SINCERE CO.,LTD		
SCALE: AS SHOWN		UNIT: mm	TITLE: PDR-13073 USB 2.0B TYPE WATERPROOF WITH CABLE AND SR		
DRAWN: BENSON_ZHENG		04 Feb 2025			
CHECKED: PEARL_HUNG		04 Feb 2025			
APPROVED: PEARL_HUNG		04 Feb 2025	PART NO.	1315202XXXX	P
	SIZE A4	SHEET 1/1	REV. B	CODE: GC	CUSTOMER:
7		8		10	

	B	ECN-2501088(KIRA)NEW P/N	23JAN2025
	A	ECN-1312059(NAOMI)(PDR-13073)	30DEC2013
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10	11	12