



CHANT SINCERE CO., LTD.

COXOC

PRODUCT GUIDE

CABLE / CONNECTOR / ACCESSORIES

📍 7F-2, No. 188, Sec. 3, Datong Rd., Xizhi Dist.,
New Taipei City 221, Taiwan (R.O.C)
☎ 886-2-8647-1251 (REP.)
📠 886-2-8647-1842, 886-2-8647-2962
✉ service@coxoc.com.tw



WEBSITE



LINKEDIN

Company Profiles

公司簡介

Integrity

Innovation

Quality

Sustainability

Chant Sincere was founded in 1985. Our core management values are honesty, quality, innovation, and sustainability. We practice the core principles in design and manufacturing all connector & cable products. We integrated the R&D, tooling, assembly and quality control skills and constantly develop innovative products to meet the fast-changing requirements (quality / cost / delivery / service) of customers.

詮欣股份有限公司創立於1985年，秉持著『誠信務實、創新求進、品質至上、永續經營』的經營理念，專業設計並生產連接器及連接線。從產品研發設計、模具製造、生產組裝、品質控管等一貫化作業，不斷研究與創新，滿足客戶於品質、價格、交期及服務上的全面需求。

Chant Sincere provide a broad range of cable and connector families to deliver total solutions for customers. These products are widely used in many industries for example: Computing, Industrial & Automation, Telecommunication, Automotive, Waterproof, Consumer and Medical Industry. Our major products are I/O connector, Board to Board connector, Waterproof connector, Industrial Connector, Automotive connector, Memory Card connector and adaptor, High-Speed connector and cable, Audio & Video connector and Server, TV, Setup BOX, Car Infotainment, Smart Phone, Card Reader, Slot & Poker Machine, GPS, Outdoor Monitor, Medical Equipment.

詮欣產品線廣泛且多元，提供客戶完整解決方案，所生產的連接器(線)應用於電腦及PC週邊、工業、通訊、汽車、防水、消費性電子、醫療等產業，例如: 筆記型電腦、桌上型電腦、平板電腦、伺服器、數位電視、電視機上盒、車用多媒體影音裝置、手機、讀卡機、電子博弈、衛星導航機、戶外監控設備、醫療器材。

Chant Sincere's quality control and manufacturing management system has earned high recognition from national organizations and customers. These include the "National Bedrock Award" and "Small Giant Award" from the Taiwan Connector maker competition and "Best Supplier awards" from Global customers.

Chant Sincere has gained the status of a global professional manufacturer of connectors and cables by providing products that go beyond the standard, with global patents and high value-adding services such as high-frequency and thermal-associated design. We are persistently improving our design and manufacturing technology, and actively collaborating with international partners.

詮欣以卓越的品質及製造能力，歷年來獲頒國家磐石獎及小巨人獎，並取得世界大廠信任贈予年度最佳供應商大獎。由於技術不斷精進，各項I/O連接器、板對板連接器、防水連接器、工業連接器、車用連接器、記憶卡連接器/轉接卡、通訊連接線、數據傳輸線、影音傳輸線...等產品均擁有多項國際專利認證，成為世界級之專業連接器製造及線材組裝廠商，並提供高頻解決方案和散熱解決方案等增值服務。

Core Competence

詮欣競爭優勢



40 Years Manufacture Experience
40年專業連接器製造



Precision Tooling Center
精密模具加工中心



ODM/OEM Capability
國際大廠OEM/ODM經驗



Wide Range of Product Line
多樣化及齊全產品線



Automation Capability
自動化設計及製造能力



Global Association & Certification
具備各項國際協會認證



Vertical Integration (Design/Tooling/Manufacturing/Test)
製程垂直整合(一貫化作業)



Quality System

ISO 14064-1 / ISO 9001 / ISO 14001 / IATF 16949 / ISO 13485

Index by Category

分類索引

 ADAS	Automotive	Board to Board
	- HSD - FAKRA - Mini FAKRA - HMTD-N - Automotive Type C - Calibration Jig (TRL, AFR & Chant Sincere in-house design test boards)	- Pin Header - Female Header - Box Header - Mini DIN Jack - High Speed Board to Board
	P01	P35

 Metaverse	Consumer Electronic	Cable / Smart Cable	Board to Board
	- USB 2.0 - USB 3.0 - USB Type C - USB4 - SD - JACK - CFexpress - Compact Flash - PCMCIA - CFast - FPC - DVI - HDMI - DisplayPort	- USB 2.0 Cable - USB 3.0 Cable - USB Type C Cable - USB4 Cable - DisplayPort Cable - HDMI Cable - Flat Cable - Smart Cable	- Pin Header - Female Header - Box Header - Mini DIN Jack - High Speed - Board to Board
	P19	P25 OTG Series OTG Cable OTG Reader USB Type C Adapter USB Type C Reader	P35

 Cloud Center	Telecom	Consumer Electronic	Cable / Smart Cable
	- DIN 41612 - RJ45 - SFP - QSFP - QSFP-DD - OSFP - Mini-SAS HD - OCulink - Slimline - Low profile Slimline - Gen-Z	- USB 2.0 - USB 3.0 - USB Type C - USB4 - SD - JACK - CFexpress - Compact Flash - PCMCIA - CFast - FPC - DVI - HDMI - DisplayPort - Adapter	- USB 2.0 / USB 3.0 Cable - USB Type C / USB4 Cable - DisplayPort Cable - HDMI Cable - Flat Cable - Smart Cable
	P11	P19	P25 PC Peripheral D-Sub Box Header Ejector Header Wafer SCART SCSI II

 AIoT	Waterproof	Cable / Smart Cable	PC Peripheral
	- Waterproof D-Sub - M8 / M12	- USB 2.0 Cable - USB 3.0 Cable - USB Type C Cable - USB4 Cable - DisplayPort Cable - HDMI Cable - Flat Cable - Smart Cable	- D-Sub - Box Header - Ejector Header - Wafer - SCART - SCSI II
	P15 Consumer Electronic USB Type C / USB 2.0 / USB 3.0 USB4 SD JACK CFexpress Compact Flash PCMCIA CFast FPC DVI HDMI DisplayPort Adapter	P25 OTG Series OTG Cable OTG Reader USB Type C Adapter USB Type C Reader	P31 Board to Board Pin Header Female Header Box Header Mini DIN Jack High Speed Board to Board
	P19	P29	P35


Automotive

Applications



Vehicle safety systems are constantly evolving, leading automakers to envision a world where vehicle collisions are a thing of the past. We are here to help you design adaptable advanced driver assistance systems (ADAS) for a safer, more automated driving experience. Our connection system helps you design efficient ADAS functionality for any vehicle.


車輛安全系統在不斷發展，汽車製造商憧憬著一個車輛不再發生碰撞的世界。我們能隨時幫助您設計適應性強的高級駕駛輔助系統 (ADAS)，以實現更安全及更自動化的駕駛體驗。我們的連接系統可幫助您為任何車輛設計高效的 ADAS 功能。

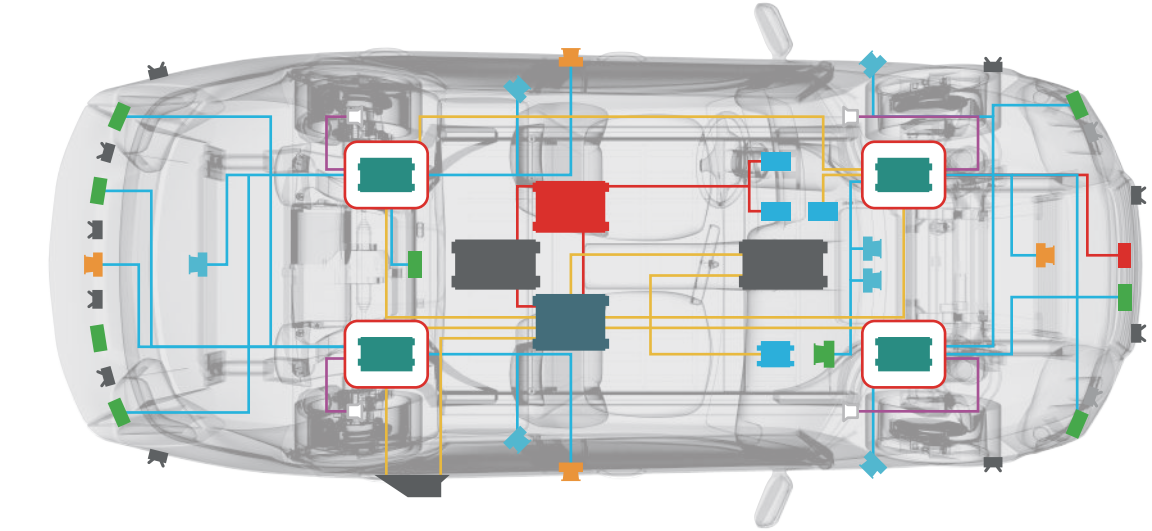

Others		
Audio	360° Camera	LiDAR
Displays	ADAS Camera	Open Server Platform
External Radar	Ultrasonic	Connected Vehicle
Driver State Sensing Camera	Central Vehicle Controller	Zone Controller
Propulsion and Chassis Controller		




543
HSD Plug Vertical Type
Coding:A,B,C,D,E,F,Z
Positions:04



Standard
Key Up

543
HSD Plug Right Angle Type
Coding:A,B,C,D,E,F,Z
Positions:04



Standard
Key Down

543
HSD Plug Right Angle Type
Coding:G,H,J,K,L,M,O
Positions:04



541
Floating Socket SMT
Position:01




Key Up

541
FAKRA Plug R/A Middle Type, CH=0.24
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



Key Down

541
FAKRA Plug R/A Middle Type, CH=0.24
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



Reverse
Key Up


543
HSD Plug Right Angle Type
Coding:A,B,C,D
Positions:04



143
HSD Jack Cable Straight Type
Coding:A,B,C,D,E,F,Z
Positions:04



143
HSD Jack to USB 2.0 Cable A/M STR Type
Positions:04



Key Left

541
FAKRA Plug R/A Middle Type, CH=0.24
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



Key Right

541
FAKRA Plug R/A Middle Type, CH=0.24
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



Key Up

541
FAKRA Plug R/A Middle Type, CH=0.33
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



143
HSD Jack to USB 2.0 Cable A/F STR Type
Positions:04



541
FAKRA Plug Vertical Type H=15.50
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01




IP Rating

701
SMB-CM to FAKRA Plug Adapter
Coding:A,F,Z
Positions:01



Key Down

541
FAKRA Plug R/A Middle Type, CH=0.33
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



Key Left

541
FAKRA Plug R/A Middle Type, CH=0.33
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



Key Right

541
FAKRA Plug R/A Middle Type, CH=0.33
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



IP Rating

701
SMB-CM to FAKRA Plug Adapter
Coding:A,F,Z
Positions:01



518
SMB-CM Board Mount FAKRA Connector
Positions:01



518
SMB Jack DIP 15.86mm
Position:01



Key Up

541
FAKRA Twin Plug R/A Type, CH=0.33
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:02




Key Down

541
FAKRA Twin Plug R/A Type, CH=0.33
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:02



141
FAKRA Jack 1x2 to Plug x2 Cable
FAKRA Jack Coding:A,B,C,D,H,I,N,Z
Positions:02

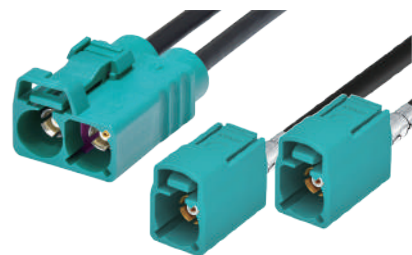

141
FAKRA Jack 1x2 to Jack x2 Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:02



141
FAKRA Plug to I-Pex MHF/MHF 4L STR Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack to Plug Straight Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack to Plug Straight Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack to Jack Straight Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack to Jack Straight Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack to Jack R/A Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack Straight to R/A Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack to Jack Straight Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack Straight to R/A Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01



141
FAKRA Jack to Jack R/A Cable
Coding:A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions:01




542
Mini FAKRA Plug 1x1 Right Angle Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:01




542
Mini FAKRA Plug 1x1 Right Angle Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:01



542
Mini FAKRA Plug 1x1 Right Angle Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:01

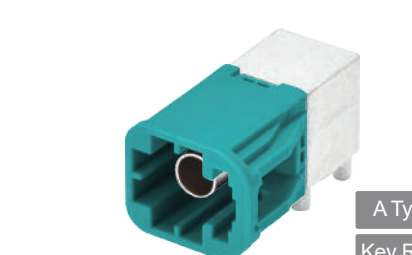

542
Mini FAKRA Plug 1x1 Right Angle Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:01

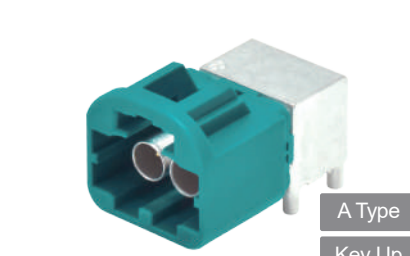

542
Mini FAKRA Plug 1x2 Right Angle Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:02



542
Mini FAKRA Plug 1x2 Right Angle Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:02



542
Mini FAKRA Plug 2x2 Right Angle Type
Coding:A,B,C,D,E,F,G,Z
Positions:04




542
Mini FAKRA Plug 2x2 Right Angle Type
Coding:A,B,C,D,E,F,G,Z
Positions:04



542
Mini FAKRA Plug 2x2 Right Angle Type
Coding:A,B,C,D,E,F,G,Z
Positions:04



542
Mini FAKRA Plug 2x2 Right Angle Type
Coding:A,B,C,D,E,F,G,Z
Positions:04

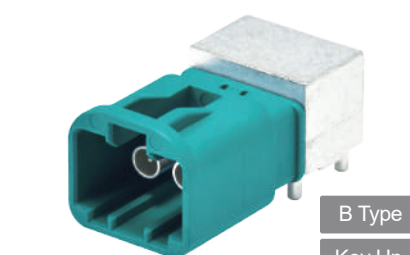

542
Mini FAKRA Plug 1x2 Right Angle Type
Coding:A,B,C,D,E,F,Z
Positions:02



542
Mini FAKRA Plug 1x2 Right Angle Type
Coding:A,B,C,D,E,F,Z
Positions:02




542
Mini FAKRA Plug 2x2 Right Angle Type
Coding:A,B,C,D,E,F,Z
Positions:04



542
Mini FAKRA Plug 2x2 Right Angle Type
Coding:A,B,C,D,E,F,Z
Positions:04



542
Mini FAKRA Plug 1x1 Vertical Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:01

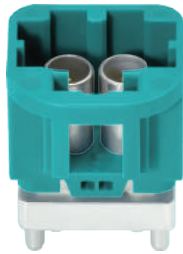

542
Mini FAKRA Plug 1x2 Vertical Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:02



542
Mini FAKRA Plug 2x2 Vertical Type
Coding:A,B,C,D,E,F,G,Z
Positions:04



542
Mini FAKRA 1x1 +MQS 2Pin Vertical Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:01+02



542
Mini FAKRA 1x1 +MQS 2Pin R/A Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:01+02




542
Mini FAKRA Plug 2x2 Vertical Type
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:04



142
Mini FAKRA Jack to Jack Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to FAKRA Plug x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04

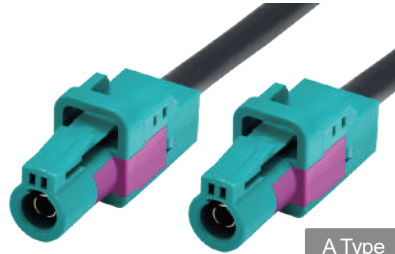

142
Mini FAKRA Jack to Jack 1x1 Cable
Coding:A,B,C,D,E,F,G,H,J,K,Z
Positions:01




142
Mini FAKRA Jack 1x1 to FAKRA Jack Cable
Coding:A,B,C,D,E,F,G,H,J,K,Z
Positions:01



142
Mini FAKRA Jack 1x2 to FAKRA Jack x2 Cable
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:02



142
Mini FAKRA Plug to Plug 2x2 Cable
Coding:A,B,C,D,E,F,G,Z
Positions:04

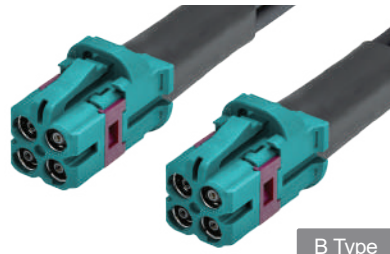

142
Mini FAKRA Jack to Jack Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to FAKRA Plug x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to FAKRA Jack x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to SMA Plug x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to SMA Jack x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to FAKRA Jack x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to SMA Plug x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to SMA Jack x4 Cable
Coding:A,B,C,D,E,F,Z
Positions:04



142
Mini FAKRA Jack to Plug 2x2
Coding:A,B,C,D,E,F,G,H,J,K,N,Z
Positions:04



142
Mini FAKRA Jack to Plug 2x2
Coding:A,B,C,D,E,F,G,H,Z
Positions:04




142
Mini FAKRA Plug 2x2 For Panel
Coding:A,B,C,D,E,F,G,H,Z
Positions:04



B Type
IP Rating

142
Mini FAKRA Plug 2x2 For Panel
Coding: A,B,C,D,E,F,G,H,Z
Positions: 04

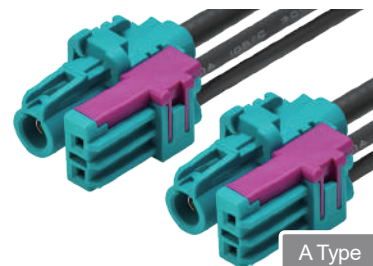


A Type

142
Mini FAKRA Jack +MQS 2Pin Cable
Coding: A,B,C,D,E,F,G,H,J,K,Z
Positions: 01+02



544
HMTD-N Plug 1x1 Vertical Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 02

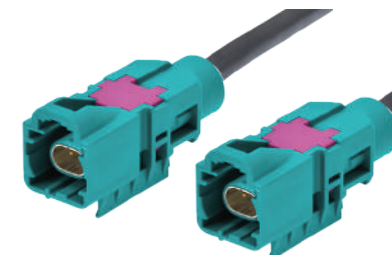

144
HMTD-N Plug 1x1 Cable
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 02




144
HMTD-N Jack 1x1 Cable
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 02



144
HMTD-N Jack 1x2 Cable
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 04



544
HMTD-N Plug 1x1 Right Angle Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 02

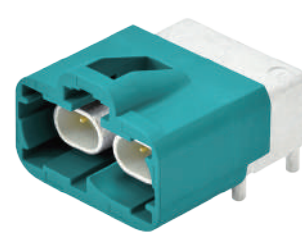

544
HMTD-N Plug 1x2 Right Angle Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 04



544
HMTD-N Plug 2x2 Right Angle Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 08



144
HMTD-N Jack 2x2 Cable
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 08



144
HMTD-N Jack 2x3 Cable
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 12



IP Rating

144
HMTD-N Jack 2x2 Cable
Coding: A,B,C,D,E,F,G,H,J,K,L,M,N,P,R,Z
Positions: 08




544
HMTD-N Plug 2x3 Right Angle Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 12



IP Rating

544
HMTD-N Plug 2x2 Vertical Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 08

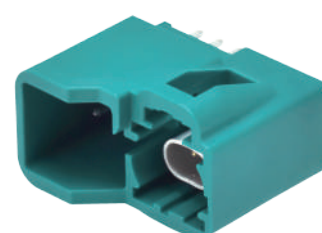

544
HMTD-N 1x1 +MQS 6Pin Vertical Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 06+02




144
HMTD-N Jack 1x1 +MQS 6Pin Cable
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 02+06



533
Automotive Type C Receptacle 40G/20G/480M
Coding: A,B




133
Automotive Type C Cable 40G/20G/480M
Coding: A,B

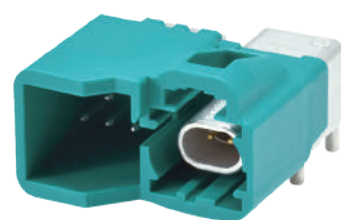

544
HMTD-N 1x1 +MQS 6Pin R/A Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 06+02




144
HMTD-N 1x2 +MQS 6Pin Vertical Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 06+04

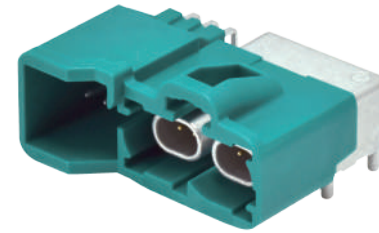


144
HMTD-N 1x2 +MQS 6Pin R/A Type
Coding: A,B,C,D,E,F,G,H,J,K,L,M,O,Z
Positions: 06+04



Adaptor
Mini FAKRA AM/BM, Jack/Plug
Positions: 02

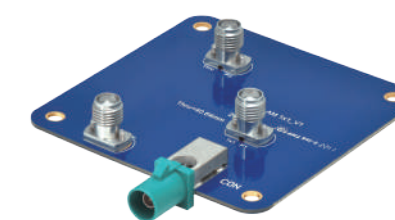

Calibration Jig
FAKRA Plug R/A Middle Type, CH=0.33
Coding: A,B,C,D,E,F,G,H,I,K,L,M,N,Z
Positions: 01

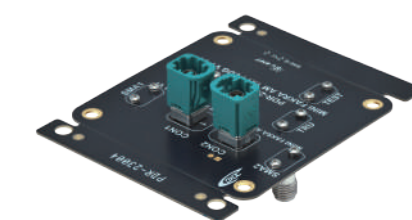

Calibration Jig
Mini FAKRA Plug 1x1 Vertical Type
Coding: A,B,C,D,E,F,G,H,J,K,N,Z
Positions: 01



ADAS



Cloud Center



Metaverse



AIoT

This type of connector is engineered for data transmission between separate devices.


Designed for speed, density, flexibility, efficiency, and standardization, our broad portfolio of pluggable input/output (I/O) connectors ensures signal integrity in communication applications.

這類型的插拔連接器是用於不同設備之間的數據傳輸。

可插拔輸入/輸出 (I/O) 連接器產品組合和通信應用中的信號完整性且專為速度、密度和靈活性以及效率和標準化而設計。


Data centers play a crucial role in modern business, serving as the backbone of numerous organizations. With the increasing demand for faster and more reliable data transmission, it is essential for data centers to have proper cabling systems in place. The transmission rate of high-performance computing (HPC) data center had evolved from 100G and 200G to 400G and InfiniBand EDR specifications to 800 Gb and beyond.

資料中心在現代商業中發揮著至關重要的作用，是眾多組織的支柱。隨著對更快、更可靠的資料傳輸需求日益增長，資料中心必需配備適當的佈線系統。高速運算 (HPC) 資料中心的傳輸速率已從100G和200G發展到400G，InfiniBand EDR規格也發展到800Gb甚至更高。

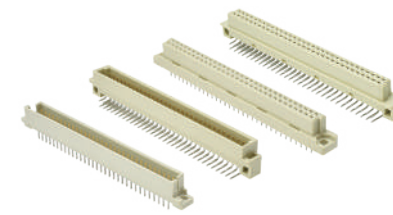

505

DIN 41612 Dual Rows B, Q Type
Positions:16,32,64

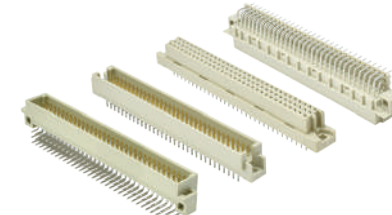


505

DIN 41612 Three Rows C, R Type
Positions:16,32,48,64,96




515

RJ45 Jack



591

SFP+ Conn.
Positions:20




591

SFP+ 28G Conn.
Positions:20




592

QSFP28G Conn.
Positions:38




592

QSFP-DD Conn.
Positions:76




591

OSFP Conn.
Positions:60




591

SFP with & w/o Light Pipes
2x1,2x2,2x4,2x6

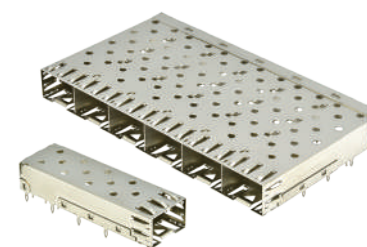


591

SFP Type Cage
1x1,1x2,1x4,1x6




591

SFP+ EMI Springs
(Stacked Cage 2x1~2x6 Type)

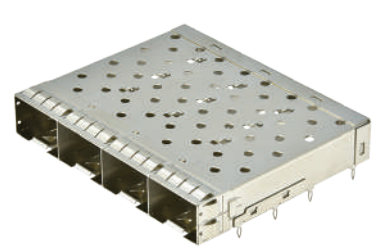

591

SFP+ EMI Spring
1x1,1x2,1x4,1x6
(also Stacked Cage 2x1~2x6 Type)

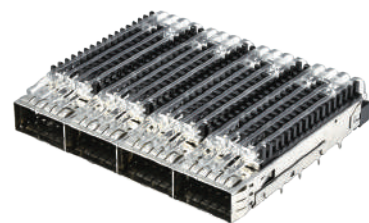

592
QSFP28G Cage Through Bezel
with PCI/SAN/NETWORKING Heatsink,
with Quad Light Pipe



592
QSFP+ Cage
with PCI/SAN/NETWORKING Heatsink,
with Single & Double Light Pipe



592
QSFP-DD Cage
with Heatsink & Light Pipes




551
Mini-SAS HD External Conn.
1x1, 1x2, 1x4



151
Mini-SAS HD 4i Cable



151
Mini-SAS HD 8i Cable

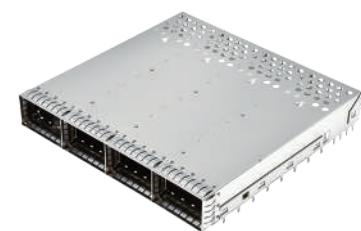

591
OSFP Cage Assembly
1x1, 1x2, 1x4



592
QSFP+ Cage with & w/o Light Pipes
(Stacked 2x1, 2x2, 2x3)



592
QSFP28G Cage with & w/o Light Pipes
(Stacked 2x1, 2x2, 2x3)



151
Mini-SAS HD 4i AOC Cable




151
Mini-SAS HD 4i Internal Cable



151
OCulink 4i R/A to 4i STR Cable



152
SFP+ DAC Cable

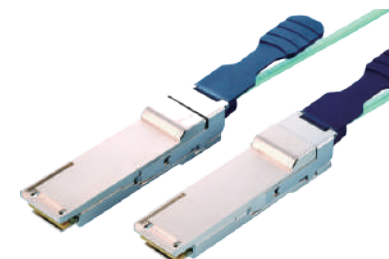

152
QSFP+ AOC Cable



152
QSFP+ DAC Cable



151
OCulink 4i STR to Mini-SAS HD 4i Cable



551
SlimSAS 8i 74P SMT Vertical Connector



151
Slimline 4i Cable



152
QSFP-DD DAC Cable 400G



152
OSFP DAC Cable



551
Mini-SAS HD Internal Conn.
1x1, 1x2, 1x4



151
Slimline 8i Cable



151
LP Slimline 16i to 2xSlimline 8i



151
Gen-Z 140P to LP Slimline 16i

Waterproof



ADAS



Cloud Center



Metaverse



AIoT

The M series features cross shielding for enhanced signal integrity and supports Cat 6A data transmission rates of up to 10 Gbps. These connectors are vibration-proof, corrosion-resistant, and rated IP67 waterproof. It's ideal for wet and harsh environments, including surveillance systems, mass rapid transit/railways, industrial automation, and broadband wireless access. Our portfolio includes A, D, and X-coded versions to serve various design needs.

M系列具有交叉屏蔽功能，可提供出色的信號完整性，並支持 Cat 6A 數據傳輸速率，最高可達10 Gbps。6A 數據傳輸速率高達 10Gbps。這些連接器防震、耐腐蝕，防水等級為 IP67。它是潮濕和惡劣環境的理想選擇，包括監控系統、大眾快速交通/鐵路、工業自動化和寬頻無線存取。

我們的產品組合包括 A、D 和 X 編碼版本，可滿足各種設計需求。

Waterproof



501

Waterproof High Density D-Sub Solder 180°



501

Waterproof High Density D-Sub 180°



501

Waterproof High Density D-Sub 90°



502

Waterproof D-Sub Solder 180°



502

Waterproof D-Sub 180°



502

Waterproof D-Sub 90°



549

M12 Assembly Solder Type Male/Female
A Code Positions:04,05
D Code Positions:04,05



549

M12 Panel Mount, with M16 Thread Male
A Code Positions:04,05,08
D Code Positions:04,05



549

M12 Panel Mount, with PG9 Thread Male
A Code Positions:04,05,08
D Code Positions:04,05



549

M12 Panel Mount Female
A Code Positions:02~12
D Code Positions:04,05



549

M12 Molding Type Male
A Code Positions:04,05
D Code Positions:04,05



549

M12 Molding Type Female
A Code Positions:04,05
D Code Positions:04,05



549
M12 Assembly Shield Type Male
A Code Positions:04,05,08
D Code Positions:04,05



549
M12 Assembly IDC Type Male
X Code Positions:08



549
M12 Assembly IDC Type Male
D Code Positions:04



149
M12 D Code to D Code Cable
D Code Positions:04
Length:1M




149
M12 D Code to D Code Cable
D Code Positions:04
Length:2M



149
M12 D Code to RJ45 Cable
D Code Positions:04
Length:60CM



549
M12 PCB Mount Female
X Code Positions:08



149
M8 Panel Mount Female
A Code Positions:04



149
M8 Panel Mount Female
B Code Positions:05



149
M12 D Code to RJ45 Cable
D Code Positions:04
Length:2M



149
M12 X Code Cable
X Code Positions:08
Length:60CM



149
M12 X Code Cable
X Code Positions:08
Length:2M



149
M12 A Code 90° Female Cable
A Code Positions:08
Length:1M5



149
M12 A/D Code 90° Male/Female Cable
A/D Code Positions:04,05
Length:1M5



149
M12 A/D Code 90° Female Cable, w/o Logo
A/D Code Positions:04,05
Length:1M5




149
M12 X Code IDC Cable
X Code Positions:08
Length:1M



149
M12 X Code IDC Cable
X Code Positions:08
Length:2M



149
M12 X Code to RJ45 Cable
X Code Positions:08
Length:60CM

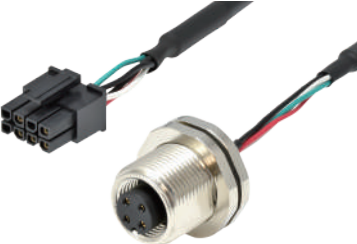

149
M12 A Code Female Rear/Front Mount,
Free End Cable
A Code Positions:04,05



149
M12 A Code to USB 2.0 A Code
A Code Positions:05
Length:200MM



149
M12 A Code to USB 2.0 A Code
A Code Positions:05
Length:1M



149
M12 X Code to RJ45 Cable
X Code Positions:08
Length:2M



149
M12 X Code(F) Panel Mount to RJ45 Cable
X Code Positions:08
Length:33CM



149
M12 X Code to M8 A Code Cable
X Code Positions:08, A Code Positions:04
Length:15M

Consumer Electronic



ADAS



Cloud Center



Metaverse



AIoT

Provides PC, Server I/O and PC peripheral connector applications, ranging from USB Type A/USB Type C/HDMI/DisplayPort/SD/CFexpress/CFast and other diverse connectors.

提供PC、Server I/O、裝置周邊連接器應用，從USB A/USB Type C/HDMI/DisplayPort/SD/CFexpress/CFast 等多樣化連接器。

USB Type C currently supports up to USB4 Gen3 40Gbps high-speed transmission, and power supports PD3.1 with 240W power transmission.

USB Type C 目前最高支援到USB4 Gen3 40Gbps 高速傳輸，電力部分支援到PD3.1 240W 功率。

Consumer Electronic



531

USB 2.0 A Type, DIP
Positions:04,08




531

USB 2.0 B Type, DIP
Positions:04



531

USB 2.0 A Type, SMT
Positions:04

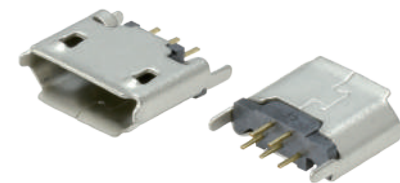

531

micro USB 2.0 AB Type, DIP
Positions:05




531

micro USB 2.0 AB Type, SMT
(Combo Solder)
Positions:05



531

Mini USB 2.0
Positions:05

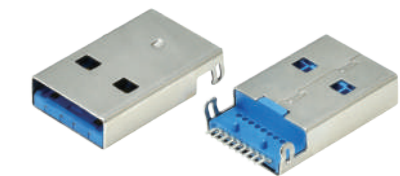

531

USB 3.0 A Plug SMT
Positions:09



531

USB 3.0 Conn. A Type Female Dual Port
Positions:18



531

USB 3.0 Conn. A Type Female SMT
Positions:09



531

USB 3.0 Conn. A Type Female
Positions:09




531

USB 3.0 Conn. A Type Female DIP
Positions:09



531

USB 3.0 Conn. B Type Female DIP
Right Angle
Positions:09

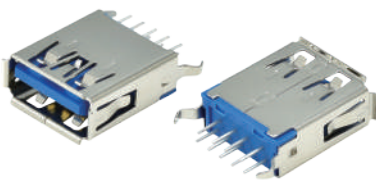


531
USB 3.0 Conn. A Type Female DIP
Straight
Positions:09




531
USB 3.0 Conn. A Type Female
Up Right Angle
Positions:09




531
micro USB 3.0 B SMT
Positions:10

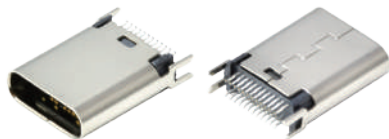

533
USB Type C Receptacle Vertical
Height=10.5mm
Positions:24

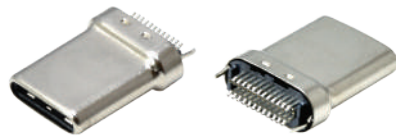

533
USB Type C Plug Extrusion Dual SMT
Positions:24

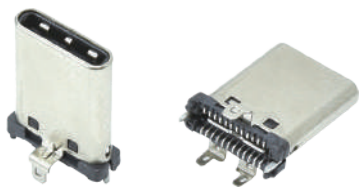

533
USB Type C Plug Dual SMT Vertical
Positions:24



531
USB 3.1 A Receptacle
(Power delivery available)
Positions:10



531
USB 3.1 Conn. 10G A Type SMT
Positions:08



531
USB 3.1 A Female Conn. DIP CH=12.58mm
Right Angle
Positions:09



Sealed

533
USB Type C Receptacle Waterproof
Top-Mount, with & w/o Screw Lock
Positions:16



Sealed

533
USB Type C Receptacle Waterproof
Top-Mount, with & w/o Screw Lock
Positions:24



Sealed

533
USB Type C Receptacle Waterproof
30u" Gold, CH=2.28mm
Positions:16



533
USB4 Type C Receptacle Right Angle
Dual SMT Top-Mount, CH=1.60mm
Positions:24



533
USB4 Type C Receptacle Right Angle
Top-Mount
Positions:24



533
USB Type C Receptacle Right Angle
Top-Mount
Positions:24



533
USB Type C Receptacle Up Right Angle
DIP+SMT
Positions:24



517
DC Power Jack



517
Earphone Jack




533
USB Type C Receptacle Dual SMT
Top-Mount, CH=1.68mm
Positions:24



Sealed

533
USB Type C Receptacle Waterproof
Top-Mount
Positions:24

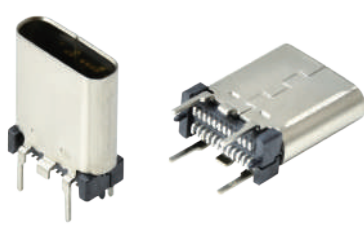

533
USB Type C Receptacle Vertical
Height=6.5mm,9.3mm,10.5mm,12mm,15mm
Positions:24




517
Miniature Jack




517
SPDIF




517
RCA Jack

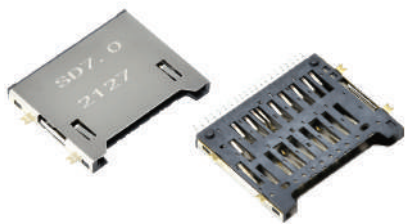

573
SD 7.0 Non Push, Top-Mount
Positions:19

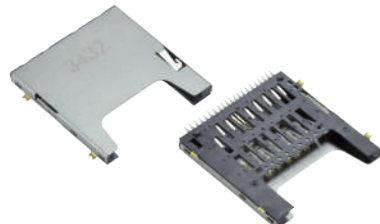


573
SD 7.0 / 8.0 / 9.0 Push Push, Top-Mount
Positions:19

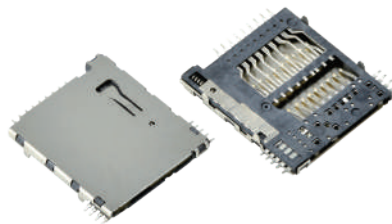


573
micro SD 4.0 Push Push & Non Push
Positions:18




575
CF, PCMCIA Card SMT Type with Grounding
Positions:50,68

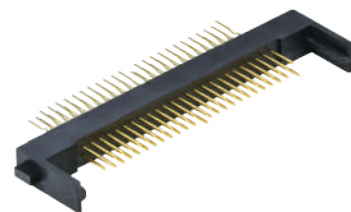

575
Compact Flash Card Socket Straddle Type
Positions:50




575
Compact Flash Card Socket Type II Slim
Type
Positions:50

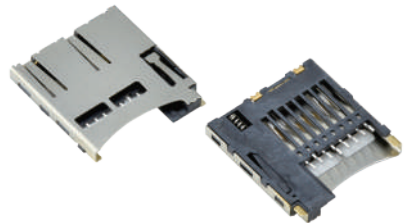

573
micro SD Push Push
Positions:08



573
micro SD Hinge Type
Positions:08

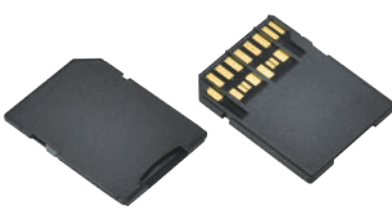


761
micro SD 4.0 to SD 4.0 Adapter
Positions:08



575
CFast w/o Ejector Stand Off 0 / 2.0 mm
Positions:24



575
CFast with Ejector Stand Off 0 / 2.0 mm
Positions:24

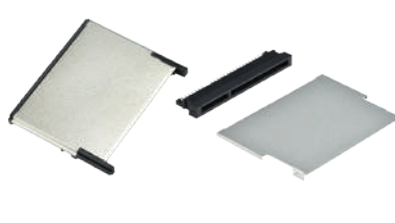

575
CFast Card
Positions:24




575
CFexpress Type A
w/ & w/o Shell Ground
Positions:13



575
CFexpress Type B
(Push Push / Non Push / Push with Lock)
Positions:21




575
CFexpress Type B Lid
Positions:21

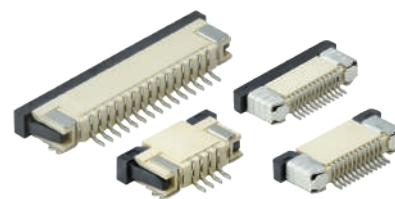

583
FPC Conn. SMT
Pitch:1.0/0.5mm
Positions:03~40



501
DVI Conn.
Positions:24,29

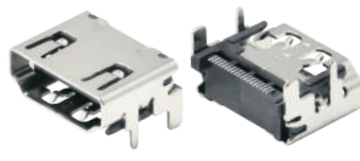

508
HDMI 2.1V Conn.
Positions:19



575
CFexpress Type C&D Bracket
Positions:64




575
CFexpress Type C&D Conn.
Positions:64




575
CF, PCMCIA Card Straddle Type
Positions:50,68



508
HDMI Conn. Up Right Type
Positions:19

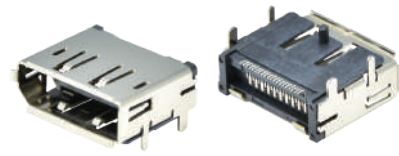

509
DisplayPort Conn. SMT Type
Positions:20

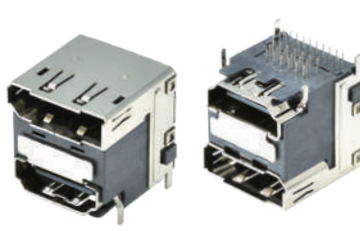

509
DisplayPort + HDMI Dual Port Conn.
Positions:39

Cable / Smart Cable



ADAS

Cables used in server applications, including USB 2.0, USB 3.2, USB 4, USB AOC, and Cat 8 cables, support both internal signal transmission and external connectivity.

應用於伺服器中的線束，包括USB2.0/USB3.2/USB4/USB AOC/Cat 8 Cable等，提供了內接訊號傳輸使用以及外接傳輸的選擇。



Cloud Center

For metaverse applications, we offer one-stop services, providing customized cable solutions for internal use as well as passive or active solutions for external connectivity.

對於元宇宙應用，從內部使用的客製化線材一直到外接線材長/短米數的方案，皆可提供一站式服務。



Metaverse

Cables for industrial applications are used under more stringent conditions. Additional functions can be added to the cables, such as USB cable with a screw lock, to increase product reliability.

工業應用線材，使用情境較為嚴苛，線材可增加額外功能，像是USB cable帶鎖，來增加產品可靠度。



AIoT

Cable / Smart Cable



131

USB 2.0 A Female Cable



131

USB 2.0 A to B Cable



131

USB 2.0 A to A Cable



131

USB 2.0 A to mini B Cable



131

USB 2.0 A to micro B Cable



131

USB 3.0 A to A Female Cable



131

USB 3.0 A to B Cable



131

USB 3.0 A to A Cable



131

USB 3.0 A to micro B Cable



133

USB Type C to C Cable with Single Screw



133

USB Type C to USB 3.1 A Cable with Dual Screw



133

USB Type C to USB 2.0 A Cable



133
USB Type C to USB 2.0 B Cable



133
USB Type C to USB 2.0 C Cable



133
USB Type C to USB 2.0 micro B Cable



133
USB Type C to USB 3.1 Gen1 A Female Cable



133
USB Type C to USB 3.1 Gen2 A Cable



133
USB Type C to USB 3.1 Gen2 B Cable



133
USB Type C to USB 3.1 Gen2 micro B Cable



133
USB Type C to USB 3.1 Gen2 Cable with E-Mark without E-Mark



133
USB4 Gen3 Cable, 40Gbps, 240W(5A/48V) 1M



133
USB4 Gen2 Cable, 20Gbps, 240W(5A/48V) 1M



133
USB4 Gen2 Cable, 5Gbps, 240W(5A/48V) 2M



133
USB Type C to DisplayPort Cable Dual Way



133
USB Type C 3.2 Gen2 AOC Cable Length:6M



133
USB Type C 3.2 Gen2 AOC Cable Length:10M



133
USB Type C 3.2 Gen2 AOC Cable Length:12M



109
DisplayPort to DisplayPort Cable



109
Mini DisplayPort to Mini DisplayPort Cable



108
DisplayPort to Mini DisplayPort Cable



108
HDMI A to A Cable 1.4v



108
HDMI A to A Cable 2.0v




115
HDMI A to A Cable 2.1v



112
Cat 5e / 6a / 7 / 8 Cable



112
DMM Socket 40 Pin Flat Cable

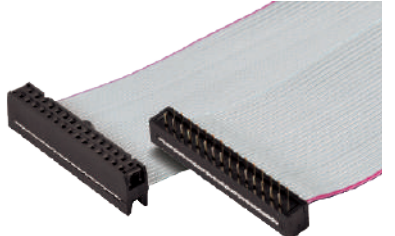

112
IDC Socket Dual Row 26 Pin to Transition Plug 26 Pin Flat Cable

OTG Series



ADAS

Provides various adapters and cross-interface applications, such as Type C to Display or Type C to HDMI adapters.



Cloud Center

提供各式轉接及跨界面應用，像是Type C to Display 或是 Type C to HDMI 轉接。



Metaverse

In addition, we offer customized adapter services, including the OTG series, which features COXOC's unique patented products.

另外有客製化轉接頭服務，其中OTG系列產品為詮欣獨有之專利產品。



AIoT



PC Peripheral



Provides PC and Server I/O peripheral connector applications.

提供PC、Server I/O 周邊連接器應用。



Cloud Center

D-Sub high-density product line offers a wide range of termination options for board and cable ends.

D-Sub high density 產品系列為電路板和電纜末端提供多種端接選擇。



Metaverse


Header Connector is used for internal/external PCB docking.

Header Connector應用於內/外部PCB對接。




AIoT

PC Peripheral

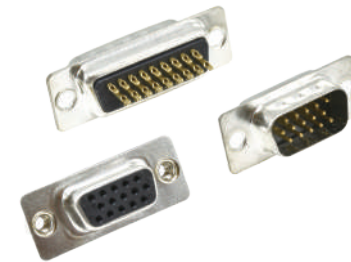

501

High Density D-Sub Solder
Positions: 15, 26, 44, 62, 78

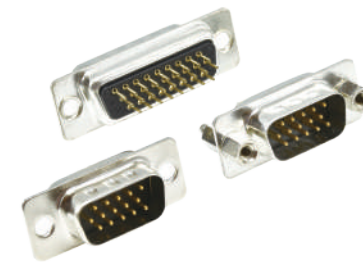

501

High Density D-Sub PCB Straight Posted
Positions: 15, 26, 44, 62, 78



501

High Density D-Sub PCB Right Angle
Positions: 15, 26, 44, 62, 78




501

High Density D-Sub Crimp Housing & Contacts
Positions: 15, 26, 44, 62, 78



501

High Density D-Sub Dual Port
Positions: 15F / 15F

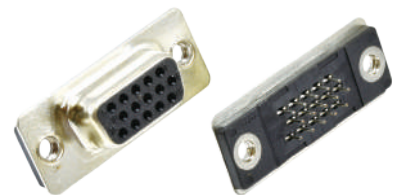

501

Slim High Density D-Sub PCB Straight
Positions: 15




502

D-Sub Solder
Positions: 09, 15, 25, 37




502

D-Sub Solder with EMI Filter
Positions: 09, 15, 25, 37, 50



502

D-Sub PCB Straight (Stamped Contacts)
Positions: 09, 15, 25, 37, 50



502

D-Sub PCB High Profile Housing Straight
Posted
Positions: 09, 15, 25, 37, 50



502

D-Sub Press Fit
Positions: 09




502

D-Sub PCB Straight (Machined Contacts)
Positions: 09, 15, 25, 37, 50



502
D-Sub PCB Straight with EMI Filter
(Machined Contacts)
Positions:09,15,25,37

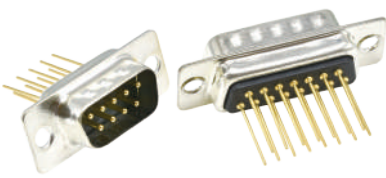

502
D-Sub PCB Straight Machined wire Wrap
Positions:09,15,25,37,50



502
D-Sub PCB Right Angle
Footprint:8.08mm(0.318")
Positions:09,15,25,37



502
D-Sub PCB Straight For Notebook
Positions:09M,25F



502
D-Sub PCB Right Angle For Notebook
Positions:09M,25F



502
D-Sub PCB Right Angle SMT For Notebook
Positions:09M,25F




502
D-Sub PCB Right Angle with EMI Filter
Footprint:8.08mm(0.318")
Positions:09,15,25,37




502
D-Sub PCB Right Angle
Footprint:10.3mm(0.405")
Positions:09,15,25,37



502
D-Sub PCB Right Angle w/o Rear Cover
Footprint:8.08mm(0.318")
Positions:09,15,25,37,50

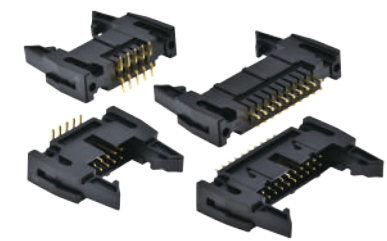

521
Ejector Header
Pitch:2.54mm
Positions:10,14,16,20,24,26,30,34,40,50,60,64

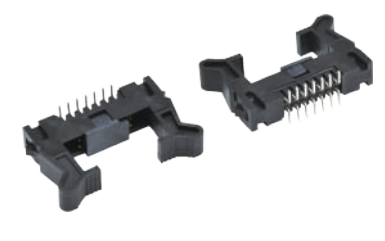

521
Ejector Header SMT
Pitch:2.0mm
Positions:6~64



514
Box Header / Box Header SMT
Pitch:2.54mm
Positions:10,14,16,20,24,26,30,34,40,50,60,64



502
D-Sub PCB Right Angle w/o Rear Cover
Footprint:10.3mm(0.405")
Positions:09,15,25,37,50




502
D-Sub PCB Right Angle
Footprint:14.96mm(0.590")
Positions:09,15,25,37



502
D-Sub Crimp Housing
Positions:09,15,25,37,50



522
IDC Socket Dual Row
Pitch:2.54mm
Positions:10,14,16,20,24,26,30,34,40,50,60,64

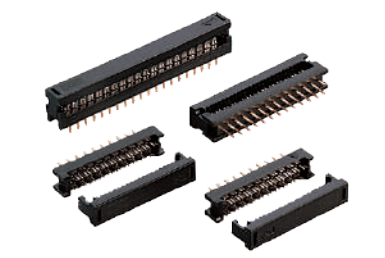

522
Transition Plug
Pitch:2.54mm
Positions:10,14,16,20,24,26,30,34,40,50,60,64




522
DIP Plug
Pitch:2.54mm
Positions:10,14,16,20,24,26,30,34,40,50,60,64




502
D-Sub Crimp Contacts




502
D-Sub IDC For Flat Ribbon Cable
Positions:09,15,19,37,50

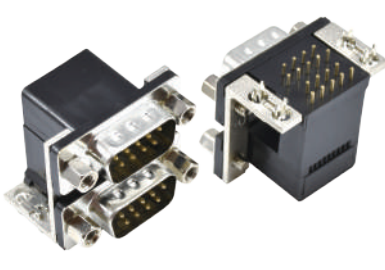


502
D-Sub Dual Port
Positions:09,15,25,37,50

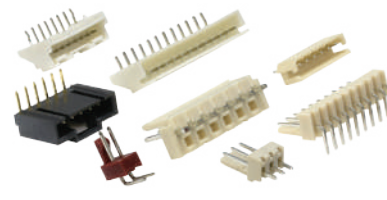

511
Wafer
Pitch:0.8,1.0,1.25,2.0,2.54,3.0,3.96,4.25,5.08,6.35
Positions:02~40

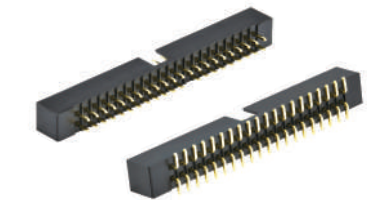

514
Box Header DIP / SMT
Pitch:2.0mm
Positions:10,12,14,16,20,24,26,34,40,44,50,68

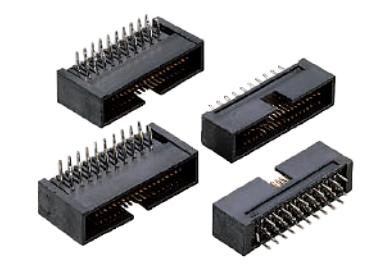

514
SCSI II Box Header
Pitch:1.27mm
Positions:20,26,32,34,40,50,52,60,68,80,100

Board To Board



ADAS



Cloud Center



Metaverse




AIoT

Diversified board-to-board connection system, ranging from Pitch 2.54mm/2.0mm/1.27mm/1.0mm. High-speed interface with Pitch 0.8mm/0.5mm, suitable for PCIe Gen4 and above applications.


多樣化板對板連接系統，範圍包括Pitch 2.54mm/2.0mm/1.27mm/1.0mm，高速介面有Pitch 0.8mm/0.5mm，可供PCIe Gen4以上之應用。

Board to Board

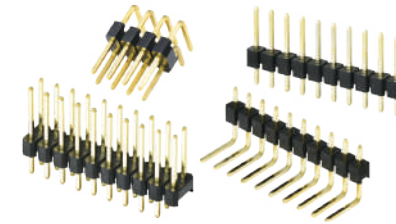


512

Pin Header DIP
Pitch:2.54mm
Positions:02~120

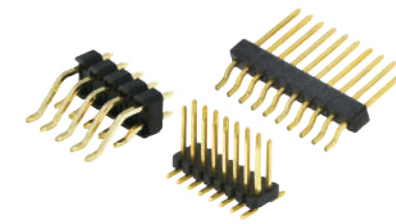


512

Pin Header SMT
Pitch:2.54mm
Positions:02~80

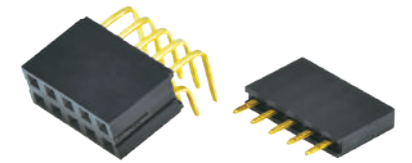


513

Female Header
Pitch:2.54mm
Positions:02~80

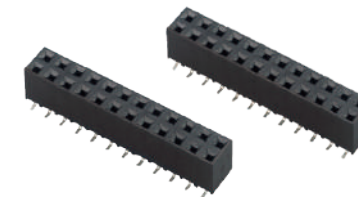

513

Female Header SMT
Pitch:2.54mm
Positions:02~80

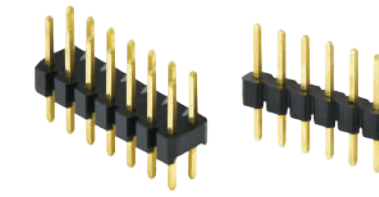


512

Pin Header DIP
Pitch:2.0mm
Positions:02~80




512

Pin Header SMT
Pitch:2.0mm
Positions:02~80



513

Female Header
Pitch:2.0mm
Positions:02~80

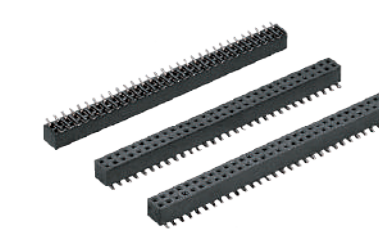

513

Female Header SMT
Pitch:2.0mm
Positions:02~80



516

Mini Jumper
Pitch:2.54/2.0mm
Positions:02




517

Mini DIN Jack
Positions:03~09




512

Pin Header
Pitch:1.27*2.54mm
Positions:02~80




512


Pin Header SMT
Pitch:1.27*2.54mm
Positions:02~80




513
Female Header
Pitch:1.27*2.54mm
Positions:02~80

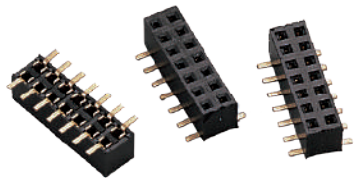


513
Female Header SMT
Pitch:1.27*2.54mm
Positions:02~80

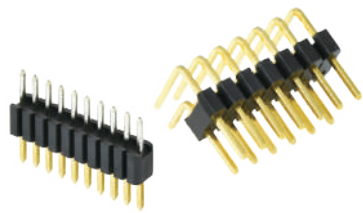


512
Pin Header
Pitch:1.27*1.27mm
Positions:02~80




512
Pin Header SMT
Pitch:1.27*1.27mm
Positions:02~80



513
Female Header
Pitch:1.27*1.27mm
Positions:02~80



513
Female Header SMT
Pitch:1.27*1.27mm
Positions:02~80

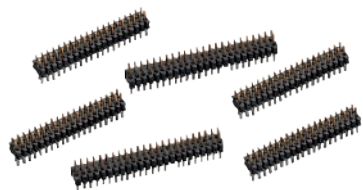

512
Pin Header
Pitch:1.0mm
Positions:10~120




512
Pin Header
Pitch:1.0mm
Positions:10~120



513
Female Header SMT
Pitch:1.0mm
Positions:10~120



514
Box Header SMT
Pitch:1.0mm
Positions:10~120

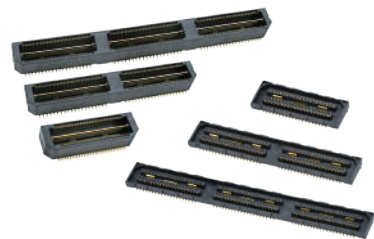

519
High Speed Board to Board
Pitch:0.8mm
Positions:28,40,56,80,84,120



519
High Speed Board to Board
Pitch:0.5mm
Positions:40,60,80,120,180



★ YEARS ★

CHANT SINCERE 40 ANNIVERSARY

- 1985 -

We sincerely thank you for your trust
and ongoing support of Chant Sincere!
We will continue to improve and strive to serve you,
and we look forward to further cooperation
and achieving more milestones together!

CHANT SINCERE CO., LTD.