
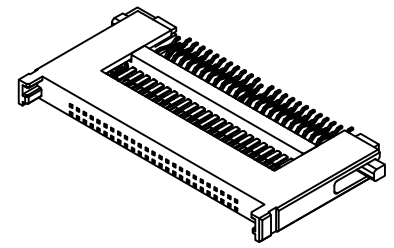


**SPECIFICATION**  
**MATERIAL**  
 Insulator: Thermal Plastic UL94V-0  
 Contacts: Copper Alloy  
 Spring: Stainless Steel  
**CONTACT PLATING**  
 Underplate: 50u"~100u" Nickel  
 Contact Area: 10u"~30u" Selective Gold  
 Solder Tails Area: 100u"~200u" Tin/Lead or 100u"~200u" Tin(Lead Free)  
**ELECTRICAL**  
 Operation Voltage: 250 VAC Max.  
 Current Rating: 1 Amps Max.  
 Contact Resistance: 40 mohms Max.  
 Insulation Resistance: 1000 Mohms Min. @ 500 VDC  
 Dielectric Withstanding Voltage: 1000 VAC / minute  
**MECHANICAL**  
 Mating Cycle: 10000 Cycle Min.  
 Temperature Range: -20°C to +85°C  
**PART NO.**

S 752C02 X 50 M X A X 3  
 1 2 3 4 5 6 7 8 9

- 1. Product Distribution  
S=Semimanufactured
- 2. SERIES NO.:  
752C02=PCMCIA Type 2 Straddle
- 3. ENVIRONMENT PROTECTION  
MATERIAL:  
F=RoHS(Matte Tin)
- 4. PIN NUMBER:  
50=50 Pin
- 5. CONTACT TYPE:  
M=Male
- 6. CONTACT AREA PLATING:  
C=15u" Gold (Selective)
- 7. STRADDLE SPACING OPTION  
A=0.35 mm
- 8. SPRING OPTION  
0=SPRING1-17 (M4414AXC2101)  
M1414AXC2P302
- 9. INSULATOR COLOR:  
3=Black

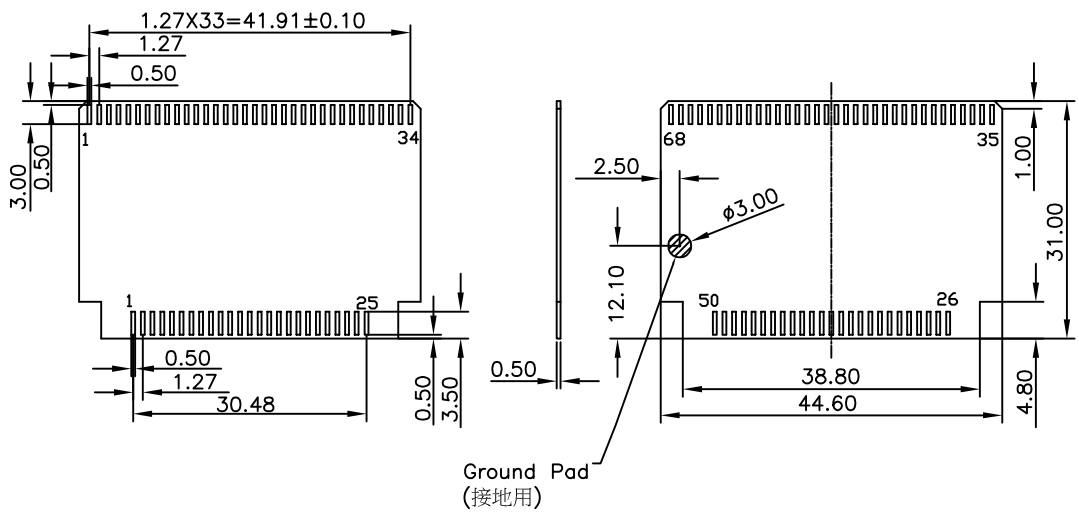

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5'
0.	±0.5
.0	±0.3
.00	±0.2
SCALE: AS SHOWN	UNIT: mm
DRAWN: JOE	01/28/08
CHECKED: / /	
APPROVED: / /	
SIZE: A4	REV: H

**OXOC**

**CHANT SINCERE CO., LTD**  
 TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: PCMCIA CF TYPE ADAPTER  
 SIMIMANUFACTURED

PRODUCT NO. S752C02X50MXAX3

FILE NAME: S752C02K50MXA03(GA)

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1	2	3	4	5	6