



Marking:JIUZHOU (UL) E327283 TYPE CM 26AWG ANSI/TIA-568-C.2
CAT6 PATCH CABLE UTP ROHS COMPLIANT XXXXft

ELECTRICAL TEST:

- 1.100% OPEN&SHORT&MISS WIRE TEST
- 2.CONDUCTOR RESISTANCE:
- 2.1 0.5FT-7FT CONDUCTOR RESISTANCE:2 Ohm/PCS
- 2.2 14FT-50FT CONDUCTOR RESISTANCE:3 Ohm/PCS
- 2.3 TEST INSTRUMENT:CCL-W-10064(诚创立)
- 3.INSULATION RESISTANCE: 5M Ohm(MIN)
- 4.HI-POT:300V DC .

3	PVC MOLDING COLOR SEE TABLE-1;
2	CAT6 RJ45 PLUG:CAT6 UTP 8P8C, PIN: GOLD FLASH;
1	CAT 6 UTP CABLE:CAT6 UTP [26AWG(7/0.16mmBC)×1Pairs]×4C OD=φ6.0±0.2mm, PVC JACKET COLOR SEE TABLE-1;
序号	说明

NO.	CABLE LENGTH	JACKET&MOLDING COLOR
1	0.5±0.05FT	BLACK
2	1FT±0.05FT	WHITE
		BLACK
3	3FT±0.05FT	BLUE
		WHITE
		GRAY
		BLACK
4	7FT±0.10FT	BLUE
		WHITE
		GRAY
		BLACK
5	14FT±0.17FT	BLUE
		WHITE
		GRAY
		BLACK
6	25FT±0.25FT	BLUE
		WHITE
		GRAY
		BLACK
7	50FT±0.50FT	BLUE
		BLACK

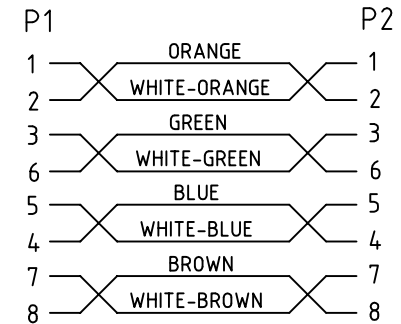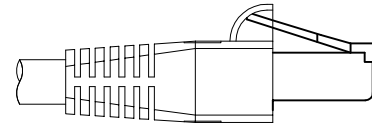

WIRE ARRANGEMENT

PART NO.

SERIES NO. CB 01 1 X A42 E 01F LENGTH NO.

CB=RJ CONNECTOR 01F=1FT,03F=3FT,07F=7FT,14F=14FT

CONNECTOR OPTION 1 25F=25FT,50F=50FT,153=0.5FT

01=RJ45/RJ45 GREEN OPTION:

CONTACT TYPE 1=M/M E=RoHS

TYPE.

A42=CAT 6

CABLE COLOR

2=Grey 3=Black

8=Blue 9=White

For SIP

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962	
ANG.	±5°		
0.	±0.5	SCALE: AS SHOWN	UNIT: mm
.0	±0.3	DRAWN PEARL	02/03/2017
.00	±0.2	CHECKED	
		APPROVED	
		SIZE A4	REV. K
		DRAWN NAME: 8P8C PLUG TO 8P8C PLUG CAT 6 UTP CABLE(PDR-15027)	
		PRODUCT NO. CB011XA42EXXF	
		FILE NAME: CB011XA42E(R03)	

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		