

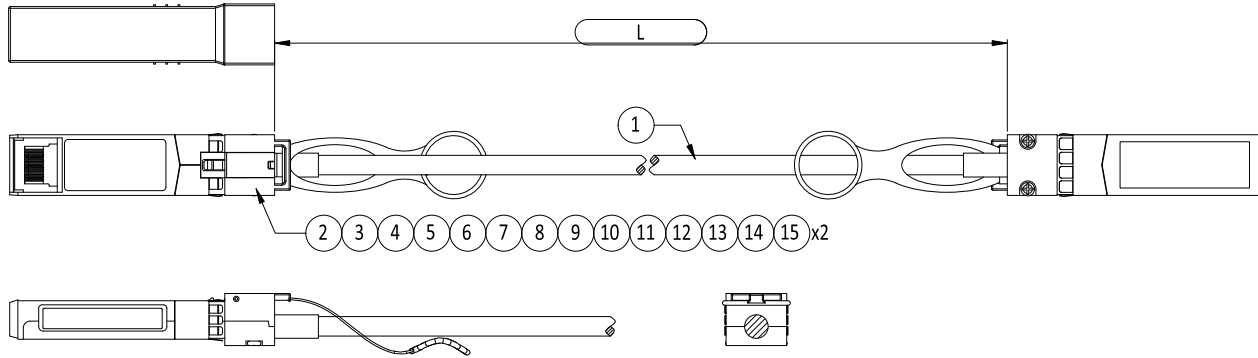


RoHS
compliant



B

EEPROM Code:CISCO-COPQAA6JAB37-0961-03V03-1M.bin (For 1M0)

SPECIFICATION

MATERIAL AND FINISH:

1. R2E=RoHS+RoHS2.0+REACH2
2. SFP MOULD NO:NEW
3. HARNESS MOULD NO: NEW

ELECTRICAL CHARACTERISTIC:

1. OPEN/SHORT100%TEST
2. CONTACT RESISTANCE: 1Ω(MAX)
3. INSULATION RESISTANCE: 20MΩ (MIN)
4. HI-POT: DC 300V/10mS

15	DUST COVER	SFP DUST COVER-R2E	2	PCS
14	COPPER FOIL	CONDUCTIVE COPPER FOILW12*L25mm-R2E	2	PCS
13	HST	HEAT SHRINK TUBE Ø5.0*L20mm-R2E	2	PCS
12	SPRING	SFP SPRING-R2E	2	PCS
11	DOWEL	SFP DOWEL-R2E	2	PCS
10	HARNESS	SFP HARNESS-R2E	2	PCS
9	LOCK	SFP LOCK-R2E	2	PCS
8	SCREW	SFP SCREW-R2E	4	PCS
7	PA66	PA66 BLACK-R2E	4	G
6	TRL THERMEL	TRL THERMELT-867 BLACK-R2E	6	G
5	SHELL	SFP ZINE ALLOY SHELL NICKEL PLATED (DOWN)-R2E	2	PCS
4	SHELL	SFP ZINE ALLOY SHELL NICKEL PLATED (UP)-R2E	2	PCS
3	TIN	TIN Ø0.6mm-R2E	0.15	G
2	PCB	SFP PASSIVE PCB+SFP PCB 加工 -R2E	2	PCS
1	CABLE	UL20276 (28#x2C+D+AM)x2+MYLAR+AL+BRAID+JACKET OD4.7 BLACK-R2E	1080	MM
ITEM	PART	DESCRIPTION	Q'TY	UNIT

	C	ECN-2311051(JOLIN)NEW P/N	27NOV2023
E1	B	ECN-199027(CAROL) ADD EEPROM CODE	11SEP2019
	A	ECN-198057(LITING)ADD DWG 3/3	26AUG2019
ZONE	REVISION	DESCRIPTION	DATE

2				
1	15211010010	CN2113B01E1M0	1000±20mm	
ITEM	NEW P/N	OLD P/N	L (LENGTH)	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP	 CHANT SINCERE CO.,LTD	
ANG. 0.00 ±0.3 ±0.2		ST Cmk Cpk		
SCALE: AS SHOWN		UNIT: mm		
DRAWN: KEVIN_ZHENG		25 Dec 2023	TITLE: PDR-	
CHECKED: PEARL_HUNG		25 Dec 2023	SFP+ Passive Copper Cable Assembly	
APPROVED: PEARL_HUNG		25 Dec 2023	PART NO.	1521101XXXX
	SIZE A4	SHEET 1/3	REV. C	CODE: GB CUSTOMER:

WIRING DIAGRAM

High Speed Signal			
P1			P2
Pad	Signal		Pad Signal
12	RX1n		19 TX1n
13	RX1p		18 TX1p
18	TX1P		13 RX1P
19	TX1N		12 RX1N
GND Group	GND		GND Group GND
GND Group 01, 09, 10, 11, 14, 17, 20			GND Group 01, 09, 10, 11, 14, 17, 20
Connector Shell			Connector Shell

Low Speed Signal & Power	
P1	
Pad	Signal
02	TX_FAULT
03	TX_DISABLE
04	MOD-DEF2
05	MOD-DEF1
06	MOD-DEF0
07	RATESELE
08	LOS
15	VCCR
16	VCCT

Serial EEPROM

Vcc


GND

Low Speed Signal & Power	
P2	
Pad	Signal
02	TX_FAULT
03	TX_DISABLE
04	MOD-DEF2
05	MOD-DEF1
06	MOD-DEF0
07	RATESELE
08	LOS
15	VCCR
16	VCCT

Serial EEPROM

Vcc


GND

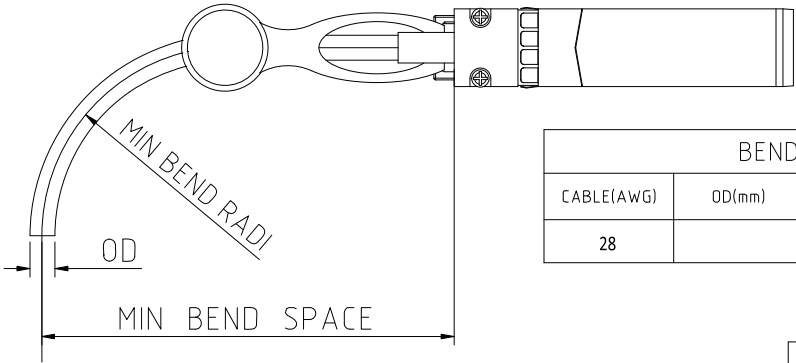



BEND RADII			
CABLE(AWG)	OD(mm)	MIN BEND RADII(mm)	MIN BEND SPACE
28			

UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP Cmk Cpk	 CHANT SINCERE CO.,LTD
ANG.	±0.3		
0.00	±0.2		
SCALE: AS SHOWN		UNIT: mm	
DRAWN: KEVIN_ZHENG		25 Dec 2023	
CHECKED: PEARL_HUNG		25 Dec 2023	
APPROVED: PEARL_HUNG		25 Dec 2023	
TITLE: PDR- SFP+ Passive Copper Cable Assembly		PART NO. 1521101XXXX	
CODE: GB		CUSTOMER:	

ZONE	REVISION	DESCRIPTION			DATE
1	C	ECN-2311051(JOLIN)SEE PAGE 1/3			27NOV2023
2	B	ECN-199027(CAROL)SEE DWG 1/3			11SEP2019
3	A	ECN-198057(LITING)ADD DWG 3/3			26AUG2019

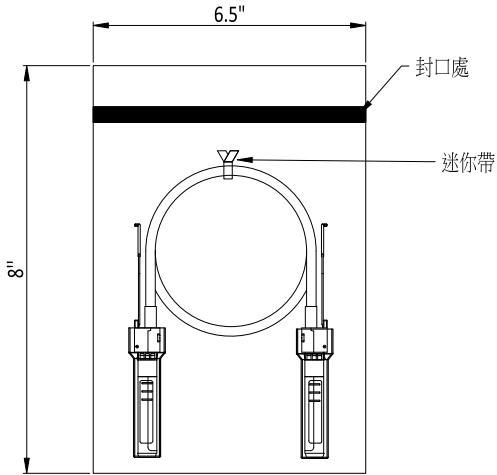


單PCS包裝視圖

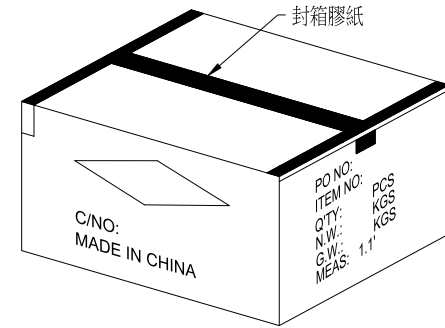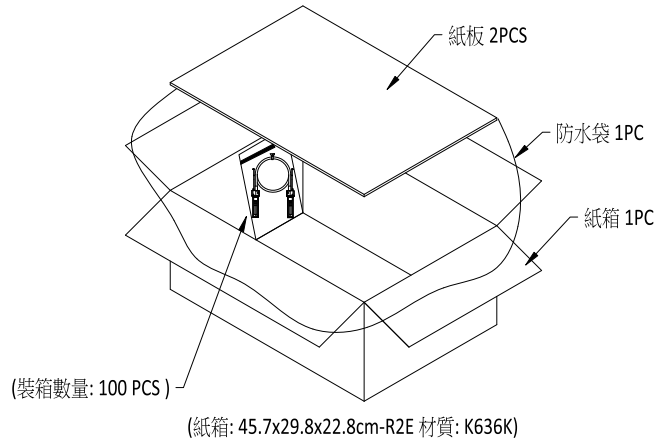

包裝說明:

- 1.單PC包裝,PE袋需熱封口,然后均勻放入紙箱內
- 2.裝箱時,先在外箱內放入1PC隔板及1PC防水袋,放入產品后,上面再放1PC隔板,再用膠紙封外箱

UNLESS OTHERWISE SPECIFIED TOLERANCE				 SIP		 CHANT SINCERE CO.,LTD	
ANG.				 Cmk Cpk			
0.00				±0.3			
0.00				±0.2			
SCALE: AS SHOWN				UNIT: mm		TITLE: PDR- SFP+ Passive Copper Cable Assembly	
DRAWN: KEVIN_ZHENG				25 Dec 2023			
CHECKED: PEARL_HUNG				25 Dec 2023			
APPROVED: PEARL_HUNG				25 Dec 2023		PART NO. 1521101XXXX	
		SIZE A4	SHEET 3/3	REV. C		CODE: GB CUSTOMER:	
7				8		9	
						10	