

Features:

- Material: Phosphor bronze
- Finished: Tin-plated
- Used in 312A(B10X) housing
- Wire range: AWG #24 ~ #30
- Thickness: 0.2mm





Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C
(including temperature rise)

PART NO.

313 A E 00 F S T B1 0 0 X 0
1 2 3 4 5 6 7 8 9 10 11 12

- | | |
|---------------------|---------------------|
| 1.SERIES NO. | 8.PITCH OPTION |
| 2.TYPE A=Crimp | B1=2.0mm |
| 3.GREEN OPTION | 9.FILL IT WITH "0" |
| E=RoHS | 10.PROCESS OPTION |
| 4.FILL IT WITH "00" | 0=NON Distribution |
| 5.CONTACT TYPE | 11.PACKAGE OPTION |
| F=Female | C=Tape Reel |
| 6.MATERIAL OPTION | D=Bag |
| S=Phosphor Bronze | 12.FILL IT WITH "0" |
| 7.CONTACT PLATING | |
| T=Tin Plated | |

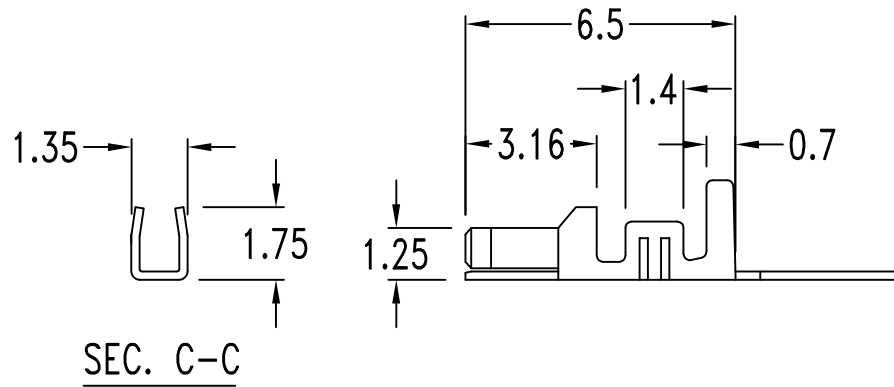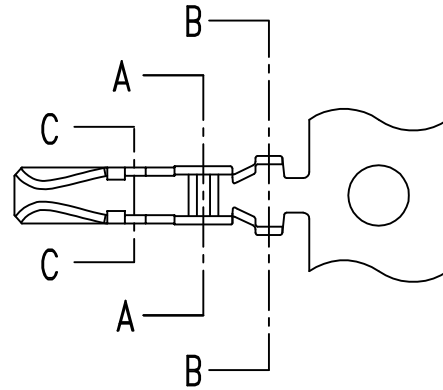

UNLESS OTHERWISE SPECIFIED TOLERANCE	
.0	±0.25
.00	±0.15
.000	±0.05

SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	09/18/13
CHECKED	/ /
APPROVED	/ /
SIZE A4	REV. X1



CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: .079" (2.0mm) Crimp Terminal
PRODUCT NO. 313AE00FSTB100X0
FILE NAME: 313AE00FSTB100X0(W3)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		