


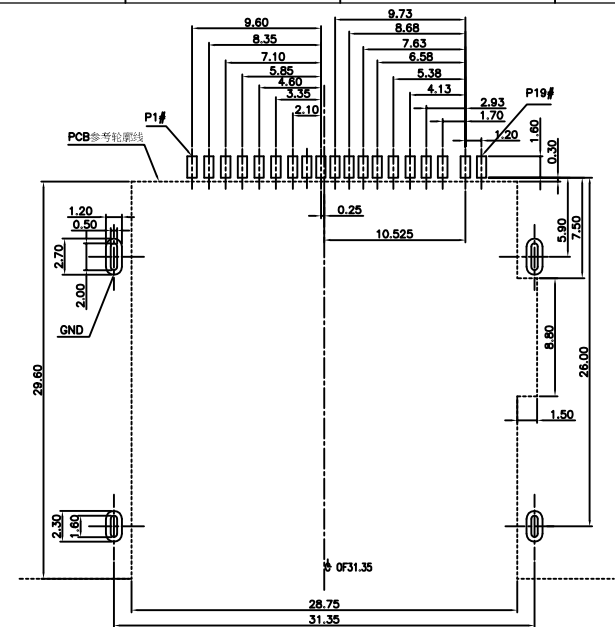

412 D H 19 H S T S5 7 1 C X
1 2 3 4 5 6 7 8 9 10 11 12

PIN#	NAME	DESCRIPTION	PIN#	NAME	DESCRIPTION
1	VSS3	GROUND	11	VDD1	SUPPLY VOLTAGE
2	DAT2	DATA LINE BIT2	12	D1-	DIFFERENTIAL DATA 1-
3	D0+	DIFFERENTIAL DATA 0+	13	CLK	CLOCK
4	CD/DAT3	CARD DETECT/DATA LINE BIT3	14	D1+	DIFFERENTIAL DATA 1+
5	D0-	DIFFERENTIAL DATA 0-	15	VSS2	SUPPLY VOLTAGE GROUND
6	CMD	COMMAND/RESPONSE	16	VSS5	GROUND
7	CD	CARD DETECT	17	DAT0	DATA LINE BIT0
8	VSS1	SUPPLY VOLTAGE GROUND	18	DAT1	DATA LINE BIT1
9	VSS4	GROUND	19	WP	WRITE PROTECT
10	VDD2	SUPPLY VOLTAGE(1.8V)			


CARD DETECT	 7# 8# CARD OUT	 7# 8# CARD INSERT
WRITE PROTECT	 19# GND WRITE PROTECTED	 19# GND WRITE ENABLE

```

7.SOLDER TAILS:
  T=TIN
8.APPLY TYPE
  S5=Reverse Type(Push) H1.25
9.SHELL OPTION:
  7=Stainless Steel(Ni)
10.Type:
  1=Standard+Mylar+鐵殼有凸肋
11.PACKING TYPE:
  A=TRAY
12.INSULATOR COLOR:
  3=Black

```

☐ For SIP

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG. ±5° 0. ±0.35 .0 ±0.30 .00 ±0.25			
SCALE: AS SHOWN	UNIT: mm	CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962	
DRAWN Jason_Huang	12/03/2015	DRAWN NAME: SD 4.0 CARD PUSH CONN. SINKING H1.25 (Reverse Type)	
CHECKED	/ /		
APPROVED	/ /	PRODUCT NO. 412DH19HSTS571XX	
	SIZE A4	REV. C	FILE NAME: 412DH19HSTS571CC(J03)