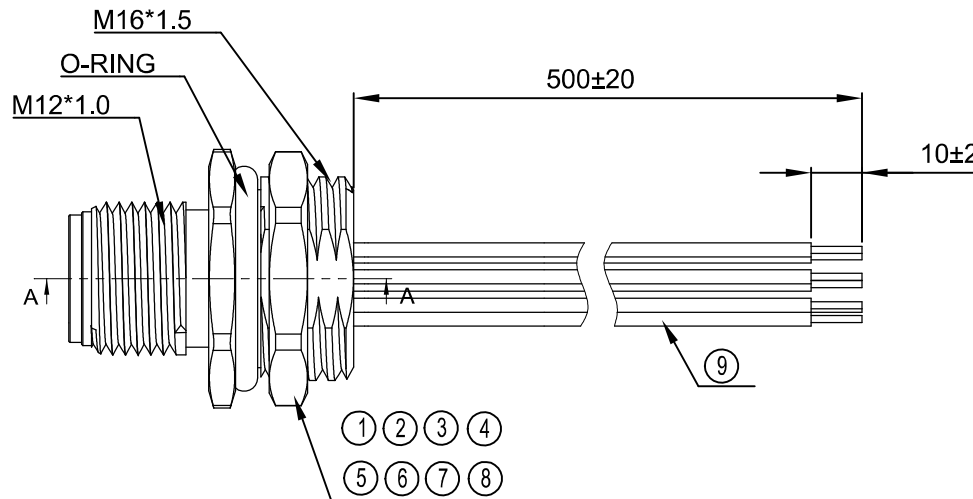
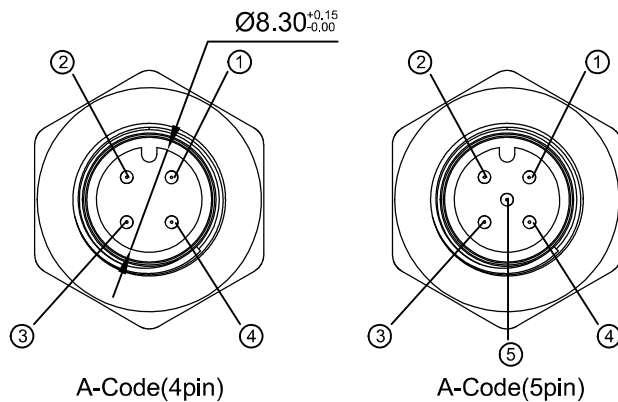


SPECIFICATION ELECTRICAL

Current rating(40°C): 4A
Voltage rating: 250V AC/DC
Temperature range: -25°C TO +85°C
PART NO.


CW 04 XX A A A B07 E XXX
1 2 3 4 5 6 7 8 9

- Series NO.
CW=Waterproof Connection
- Connector Option:
04=M12 180° Male / Open
- Pin:
A4=04/00 pin
A5=05/00 pin
- Code:
A=A-Code
- IP:A=67
- AWG:
A=22AWG
- TYPE:
8.Green Option:
E=RoHS
- Length:
EX. 50C=500mm

WIRING DIAGRAM(22AWG)

- BROWN
- WHITE
- BLUE
- BLACK
- GREY

ITEM	PART	DESCRIPTION
1	CONNECTOR	M12 A-Code Female Connector
2	Contact	M12 A-Code; BRASS(C3604-EH) 1u" Gold
3	Front body	M12 A-Code; PA66(GF15%) UL94V-0
4	Ø14*1.6 mm O-ring seal	Silicon rubber UL94V-0
5	Female coupling nut panel_rivet	BRASS(C3604-EH) 50u" min. Nickel
6	M16-1.5 NUT	BRASS (C3600-EH) 80u" min. Nickel
7	Epoxy	NAEFUMI0 7391-38 A:B=3:1
8	Cable	GRN,BLU,BLK UL1007 AWG22 CSA COLOR:(Brown/Black/White/Blue/Grey)

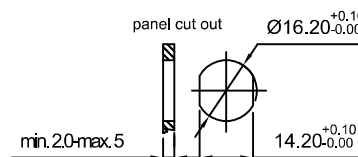

UNLESS OTHERWISE
SPECIFIED TOLERANCE
ANG. ± 5°
0. ± 0.5
.0 ± 0.3
.00 ± 0.2

SCALE: AS SHOWN

UNIT: mm

DRAWN CHERRY

05/25/2018

CHECKED

/ /

APPROVED

/ /



SIZE A4

REV. A



CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962


DRAWN NAME: PDR-18026
M12 A Code MALE REAR Mount
with lead 4, 5pin 1/2

PRODUCT NO. CW04AXAAAB07EXXX


FILE NAME: C-CW04AXAAAB07E50C

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1				A	C-CW04AXAAAB07E50C

① 1.PCS CABLE




2. 將1條Cable裝入一個夾鏈袋內

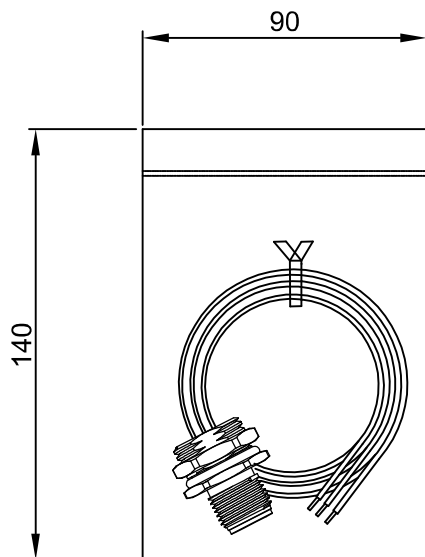

② 夾鏈袋:L140*W90*T0.08mm

⑤



5. 將200PCS/CARTON，再封箱


側唛

P/O No.:
ITEM No.:
Q'TY: PCS
N.W.: KGS
G.W.: KGS
MEASMT:14"*9.5"*5"

NOTES

1. MATERIALS: PET
 2. PACKING:200PCS/CARTON
 3. SONY SS-00259/RoHS
- All Material in According With The Rohs Environment
Related Substances List Controlled
(包裝:紙箱, 膠帶, 油墨, 真空盤, 填充物不含禁用物質)

4. 將1包防水袋，共200條Cable一起放入紙箱

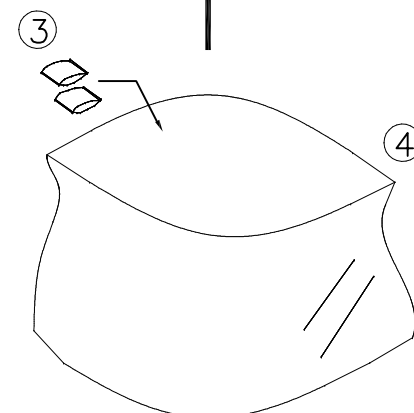

3. 將200條線裝入一個防水袋內，並放入兩包乾燥劑

05	M9CE356241127500	棕色外箱 (K=A)	356(L)*241(W)*127(H)	1
04	M9BE71163507009	Waterproof bag	711(L)*635(W)*0.7(T)	1
03	M90000EZ0000029	干燥劑	透明	2
02	M9BE14009000819	夾鏈袋	140(L)*90(W)*0.08(T)	200
01	CW04AXAAAB07E50C	M12 A Code MALE rear mount with lead 4, 5pin		200
ITEM	Part NO.	DESCRIPTION	SPECIFICATION	QUANTITY

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.5 .0 ±0.3 .00 ±0.2		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962		
SCALE: AS SHOWN	UNIT: mm	DRAWN NAME: PDR-18026		
DRAWN CHERRY	05/25/2018	M12 A Code Male rear Mount with lead 4, 5pin Packing 2/2		
CHECKED	/ /	PRODUCT NO. CW04AXAAAB07EXXX		
APPROVED	/ /	FILE NAME: C-CW04AXAAAB07EXXX		

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			A4	A	C-CW04AXAAAB07EXXX