


NOTE:  
 1.THE CABLE ASSEMBLY SHOULD BE RoSH2.0 COMPLIANT.  
 2.THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:  
 TERMINATION AREA:85±15% OHMS,CABLE ABSOLUTE:85±10% OHMS  
 3.ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIE GEN4 INDUSTRIAL STANDARD.

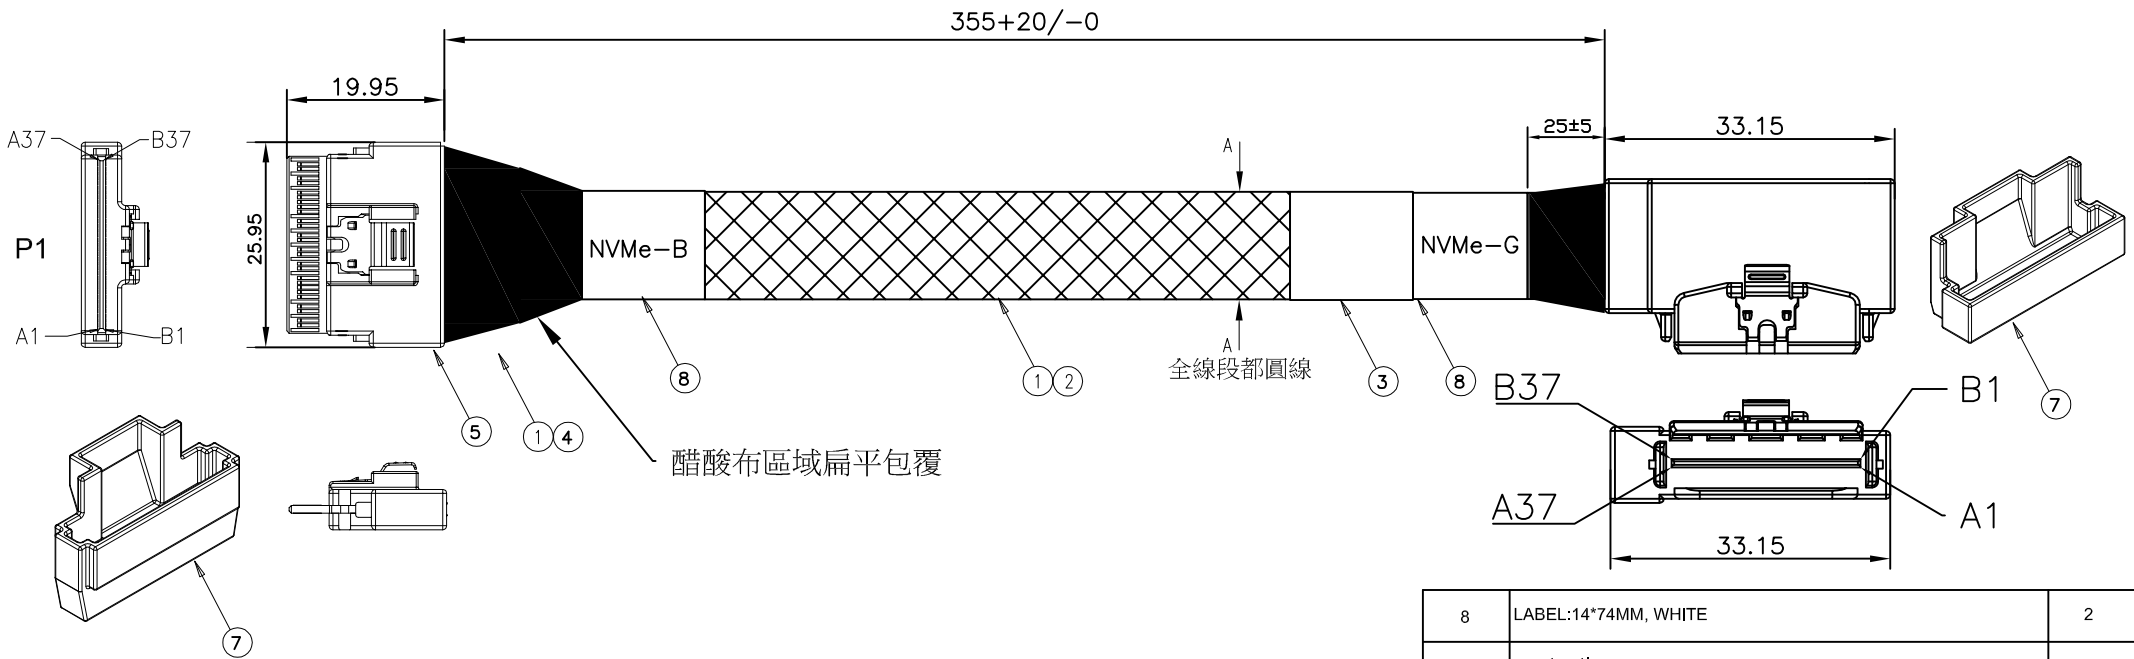

PART NO

C10 M2 1 3 B01 E 355  
 1 2 3 4 5 6 7

1.SERIES NO.

C10=SATA TYPE

2.CONNECTOR OPTION

M2=LP SlimSAS 8X(37\*2)

LS/SlimSAS 8X(37\*2)STR

3.STRCONNECTOR TYPE

1=M/M

4.CABLE COLOR

3=BLACK

5.TYPE.

6.GREEN OPTION:

E=RoHS

7.LENGTH NO.

355=355mm

8	LABEL:14*74MM, WHITE	2
7	protective cover	2
6	LP 8X RA SlimSAS PLUG,Au30u" Left side-exit	1
5	SlimSAS 8i STR,Black,V0,85Ω	1
4	ACETOUS Tape, W=1 INCH,Black	A/R
3	Label:Synthetic paper,70*40mm, WHITE	1
2	EXPANDO TUB:7.0mm,BLACK,SINGLE(OD7~25mm)	A/R
1	SAS Cable:UL20744(30#SCC/1P+2D,VW-1.85Q,24G,YEL	A/R
ITEM	DESCRIPTION	QTY

UNLESS OTHERWISE SPECIFIED TOLERANCE  
 ANG. ±0°  
 0. ±0  
 .0 ±0.50  
 .00 ±0.30



CHANT SINCERE CO., LTD  
 TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN UNIT: mm

DRAWN Yang 04/22/2019

CHECKED / /


APPROVED / /

DRAWN NAME: (PDR-18)  
 SAS SlimSAS 8i TO LP 8i SlimSAS Left side  
 1/2

PRODUCT NO. C10M213B01E355

FILE NAME: C10M213B01E355(GB)

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	X5

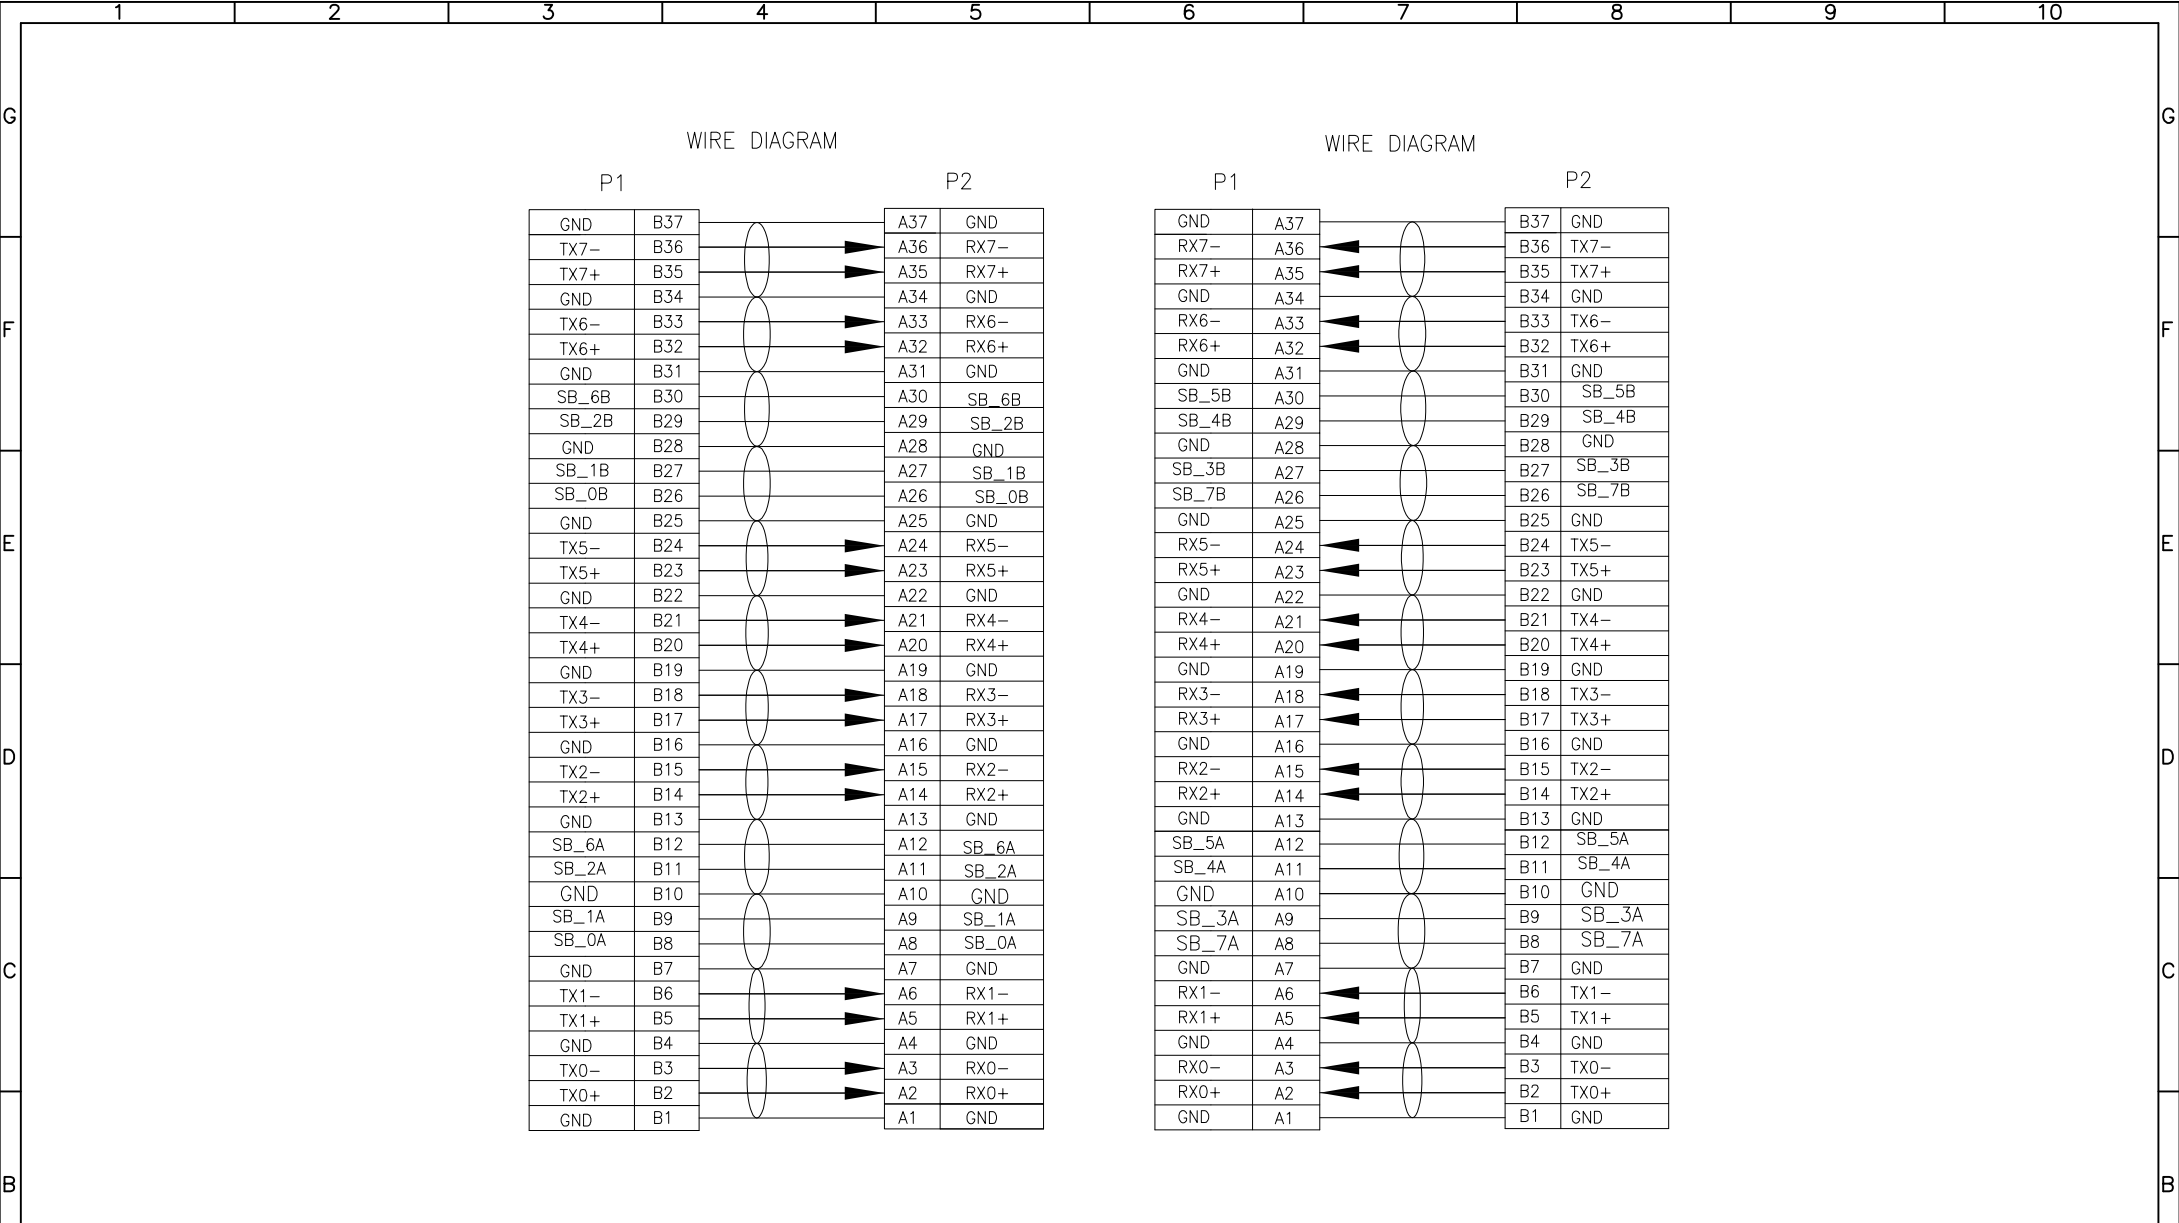

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±0° 0. ±0 .0 ±0.50 .00 ±0.30	 <b>CHANT SINCERE CO., LTD</b> TEL:886-02-86471251 FAX:886-02-86472962
SCALE: AS SHOWN UNIT: mm	
DRAWN Yang	04/22/2019
CHECKED / /	
APPROVED / /	
DATE	REV. X5
SIZE A4	FILE NAME: C10M213B01E345(GB)

REV.	DESCRIPTION	DATE