


USB C Plug

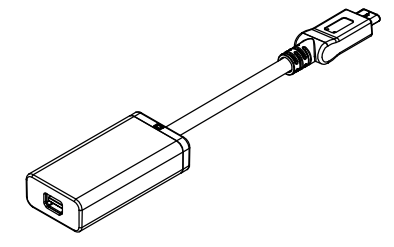

PART NO. _____

SERIES NO. _____

C8=USB TYPE

CONNECTOR OPTION _____

FC=USB 3.1/miniDP

CONTACT TYPE _____

N= CM/F

CABLE COLOR _____

3=BLACK

2=GRAY(灰線白殼)

LENGTH NO. _____


O5C=50mm

GREEN OPTION:


E=RoHS

TYPE.

B02=Via Ver.

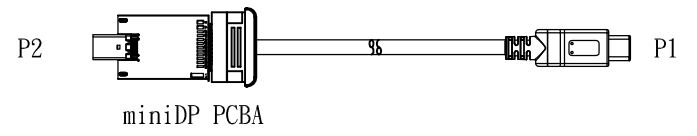

11	主體殼	HDB 15P/F塑膠蓋(ABS+PC, 3=黑色 2=白色, 表面:鏡面拋光, 客戶LOGO Printing)
10	後殼	塑膠蓋(ABS+PC, 黑色, 表面咬花:MT-11000)
9	鐵殼	SPCC, SHELL PLATED NICKEL
8	內模	PE
7	PCB'A	L:30*W:21*T1.0mm(FR-4,4層板)
6	Tin	錫絲,錫條,錫膏(符合RoHS)
5	分線排	32AWG 分線排
4	套管	黑色熱縮套管 0.8*15mm & 2.5*6mm
3	CONN.	MINI DP FEMALE, BLACK INSULATOR,SHELL PLATED NICKEL
2	CONN.	USB C PLUG, CONTACT PLATING: Pd-Ni 30u"+Gold 2u" SHELL PLATED NICKEL, (W/TIN PLATE), BLACK INSULATOR
1	CABLE	USB3.1 UL20276 32/32/26 ADB OD:4.8mm, BLACK PVC JACKET
Item	Name	Description

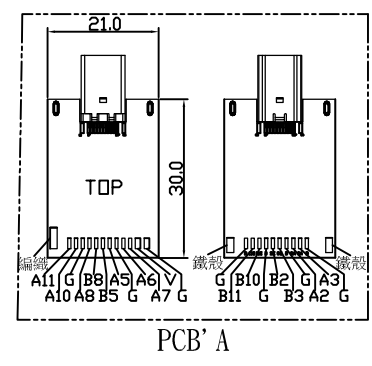

UNLESS OTHERWISE SPECIFIED TOLERANCE

0.	±1.0
.0	±0.5
.00	±0.3

SCALE: AS SHOWN UNIT: mm

DRAWN PEARL 09/26/2016

CHECKED

APPROVED

CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: (PDR-1609057)
USB C PLUG TO miniDP F
CABLE L=5cm

PRODUCT NO. C8FCN3B02E05C

FILE NAME: C8FCN3B02E05C(GB)

REV.	DESCRIPTION	DATE	SIZE A4	REV. A
1				

