



A-Code(5pin)



A-Code(4pin)

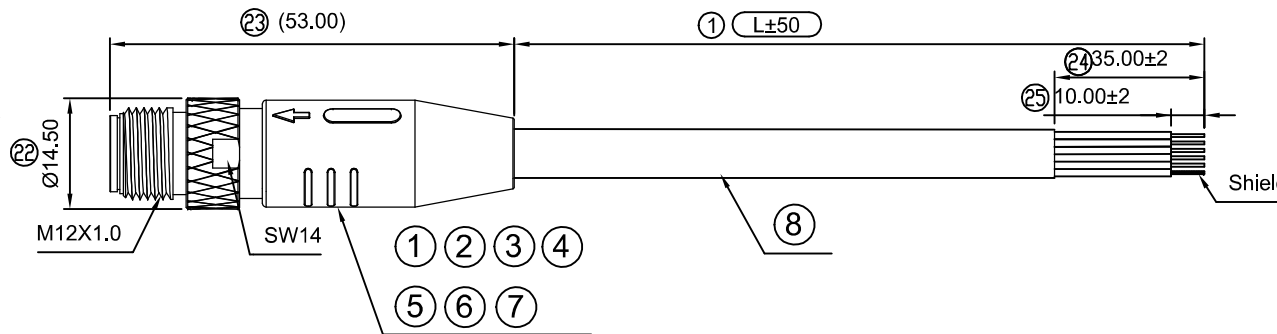

SPECIFICATION

ELECTRICAL

Current rating(40°C): 4A

Voltage rating: 4pin:250V;5pin:60V AC/DC

Contact resistance:2Ω Max.

Insulation resistance:100 MΩ Min.

Temperature range: -25°C TO +85°C

PART NO.

CW	04	AX	A	A	A	B04	E	XXX
1	2	3	4	5	6	7	8	9

1.Series NO.

CW=Waterproof Connection

2.Connector Option:

04=M12 180° Male / Open

3.Pin:

A4=04/00 pin

A5=05/00 pin

4.Code:

A=A-Code

5.IP:A=67

6.AWG:

A=22AWG

7.TYPE:

B04=W/O Logo

8.Green Option: E=RoHS

9.Length:

EX.60C=60CM, 3M5=3.5M

1M0=1M, 2M0=2M

WIRING DIAGRAM(22AWG)

1 ——— 1 BROWN

2 ——— 2 WHITE


3 ——— 3 BLUE

4 ——— 4 BLACK

5 ——— 5 GRAY

SHELL ——— SHELL

ITEM	PART	DESCRIPTION
1	Connector	M12 A-Code 4/5pin Male Cable end
2	Contact	BRASS(C3604-EH) Over 50u" Nickel min. 1u" Gold
3	Male Front Metal Body	BRASS(C3604-EH) 50u" Nickel min.
4	Male Middle Holder	BRASS(C3604-EH) 50u" Nickel min.
5	Plastic Body	PA66(6401G6) GF30% ,rated UL94V-0
6	Epoxy	NAEFUMI0 7391-38 A:B=3:1
7	Molding	TPR
8	Cable	UL2661#22(17/0.16 TA) AE 5C OD:5.7+/-0.2mm,Jacket:PVC Black



For SIP

For CmK/Cpk

UNLESS OTHERWISE
SPECIFIED TOLERANCE

ANG.	± 2°
0.	± 0.50
.0	± 0.30
.00	± 0.20

SCALE: AS SHOWN UNIT: mm

DRAWN RILEY 05/04/2018

CHECKED

APPROVED

DATE

SIZE A4 REV. A



CHANT SINCERE CO.,LTD

TEL:886-02-86471251 FAX:886-02-86472962


DRAWN NAME: PDR-18042

M12 A-Code 4(5)pin Male with cable
open end-Molding Type 1/2


PRODUCT NO. CW04AXAAAB04EXXX

FILE NAME: CW04AXAAAB04E



REV.	DESCRIPTION	DATE	SIZE	A4	REV.	A	FILE NAME:	CW04AXAAAB04E
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								

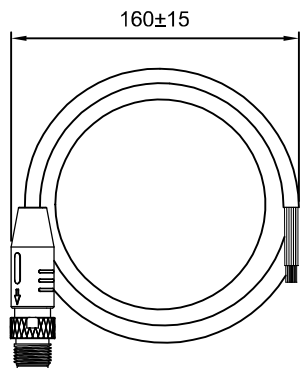


M12 CABLE

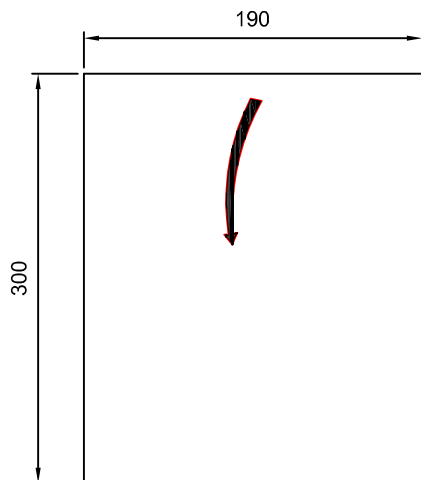


PE BAG:L300mmxW190mmxT0.08mm.
1PC CABLE/PE BAG

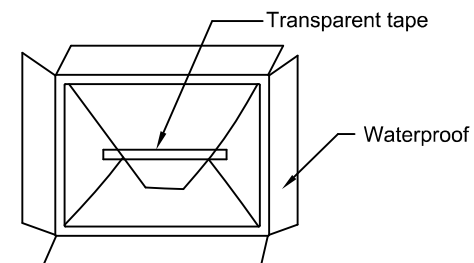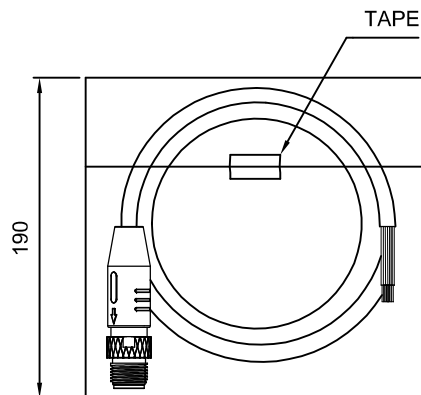

(After the installed Product, carton sealing tape should be transparent)

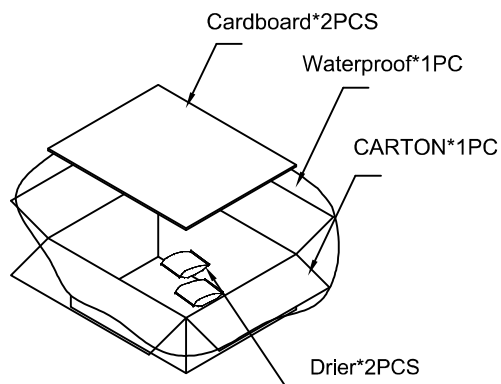

(CARTON:L17.75"*W12.5"*H13",Material K=K)
(25PCS CABLE/CARTON)

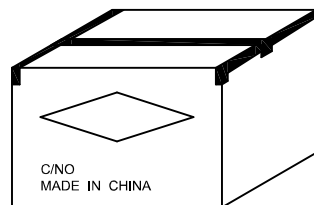

側嘜

PO NO:
ITEM NO:
Q'TY: PCS
N.W.: KGS
G.W.: KGS
MEAS: 1.1'

(CARTON SIDE)

06	M9JE00005001009	透明膠帶	50(L)*50(W)	1
05	M9EE350220000300	隔板	350(L)*220(W)	2
04	M9CE451318330500	棕色外箱 (K=A)	17.75"(L)*12.5"(W)*13"(H)	1
03	M9BE71163507009	Waterproof bag	711(L)*635(W)*0.7(T)	1
02	M90000EZ0000029	干燥劑	透明	2
01	CW04AXAAAB04EXXX	M12 A-Code 4(5)pin Male with cable open end-Molding Type		25
ITEM	Part NO.	DESCRIPTION	SPECIFICATION	Q'TY

UNLESS OTHERWISE
SPECIFIED TOLERANCE
ANG. ± 2°
0. ± 0.50
.0 ± 0.30
.00 ± 0.20

SCALE: AS SHOWN



UNIT: mm

DRAWN RILEY

05/04/2018

CHECKED

APPROVED



SIZE A4

REV. A

OXOC

CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: PDR-18042
M12 A-Code 4(5)pin Male with cable open end-Molding Type 2/2



PRODUCT NO. CW04AXAAAB04EXXX

FILE NAME: CW04AXAAAB04E

REV.

DESCRIPTION

DATE



SIZE A4

REV. A

FILE NAME: CW04AXAAAB04E